


WR-90 to SMA Female Straight Waveguide to Coax Adapters with UBR100 Flange,8.2-12.4GHz

WR90/SMA-UBR100-K-T

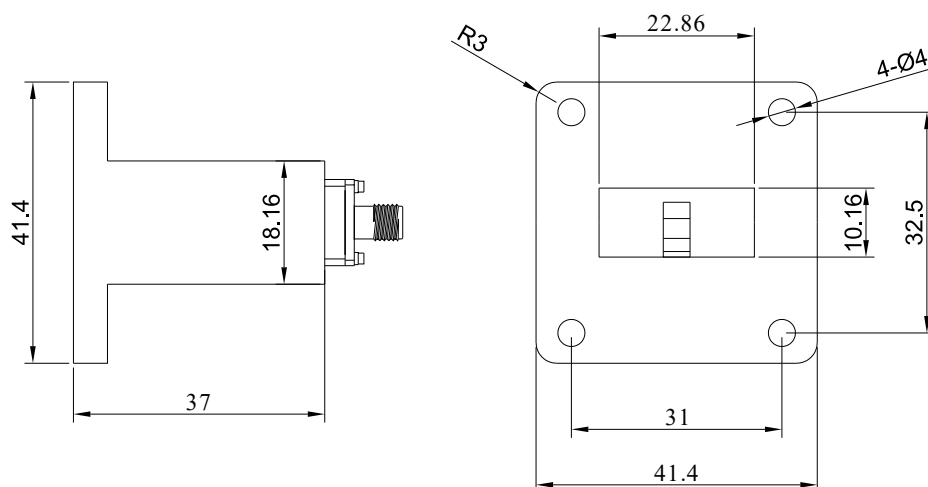

Dimensions are in mm

Product Configuration

| | |
|---------------------------|----------|
| Body Style | Straight |
| Flange Designation | UBR100 |
| Waveguide Size | WR-90 |
| Connector Series | SMA |
| Connector Polarity | Standard |
| Connector Gender | Female |
| Connector Impedance (Ohm) | 50 |

Electrical Specifications

| | |
|-----------------|-------------|
| VSWR | 1.2 |
| Insertion Loss | ≤0.25 |
| Frequency Range | 8.2-12.4GHz |

Mechanical Data

| | |
|---------------|----------|
| Weight | 55.65 |
| Body Material | Aluminum |

Enviromental Specifications

| | |
|-----------------------------|------------------|
| RoHS Compliant | Yes |
| Operating Temperature Range | -30 °C to +70 °C |

NOTE:information herein is believed by Gwave to be accurate.However,Gwave assumes no responsibility for any omissions or errors inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use.Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty,including any warranty of merchat ability or fitness for a particular purpose.