


Electrical Specifications

Frequency Range, GHz	18 ~ 40
Impedance, Ohms	50
Insertion Loss Max.[dB]	≤ 1.0
Amp.Bal. Max.[dB]	±0.4
Input VSWR Max.	1.5
Output VSWR Max.	1.5
Isolation Min.[dB]	Typ.20 / min.17
Phase Bal. Max.[Deg.]	±4
CW Power Max.[W]	Forward Power 20W; Reverse Power 1W

Mechanical Specifications

Conn.Type	2.92mm(F)
Weight Max[g]	21
Operating Range deg.[C]	-45 ~ 85
Color	Black

Outline Drawing

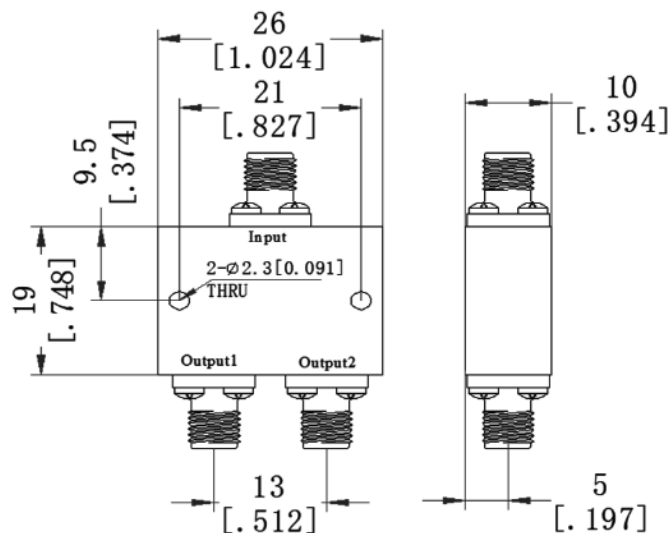

Notes

- Insert loss does not include theoretical power distribution insert loss[3dB].
- Compliant MIL-STD-810G environment test standard.