

Coaxial

High Power Amplifier

ZHL-100W-52+

50Ω 100W 50 to 500 MHz

Features

- High power, 100 Watt
- Excellent IP3, +57 dBm typ.
- Class A amplifier, usable up to 100W.
- No damage with an open or short output load under full CW output power¹
- Shuts off when base plate temperature exceeds +100°C
- Internal power regulator (current remains constant over 22 to 28V)
- Over voltage protection, shut off above 29V
- Protected by US Patent 7,348,854

Applications

- VHF/UHF transmitters
- Defense
- Amateur radio, FM, TV
- Laboratory use



Model No.	ZHL-100W-52-S+	ZHL-100W-52X-S+ [▲]
Case Style	BT1165	
Connectors	SMA	
Price (Qty.)	\$1995.00 ea. (1-9)	\$1920.00 ea. (1-9)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Electrical Specifications at 25°C

Parameter	Condition (MHz)	ZHL-100W-52+			ZHL-100W-52X+ [▲]			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Frequency Range		50		500	50		500	MHz
Gain		47	50		47	50		dB
Gain Flatness			±1.2	±1.8		±1.2	±1.8	dB
Output Power at 1dB compression	200-300	+46.5	+48		+46.5	+48		dBm
	50-500	+45	+47		+45	+47		
Saturated Output Power at 3dB compression	200-300	+47.5	+49		+47.5	+49		dBm
	50-500	+46.5	+48.5		+46.5	+48.5		
Noise Figure			4.5	8.0		4.5	8.0	dB
Output third order intercept point			+57			+57		dBm
Input VSWR			1.45			1.45		:1
Output VSWR			2.5			2.5		:1
DC Supply Voltage			24	25		24	25	V
Supply Current				10.5			10.2	A


1. At constant open or short load 24V nominal supply voltage

[▲] Heat sink and fan not included. Alternative heat sinking and heat removal must be provided by the user to limit maximum base-plate temperature to 85°C, in order to ensure proper performance. For reference, this requires thermal resistance of user's external heat sink to be 0.08°C/W max.

Outline Drawing

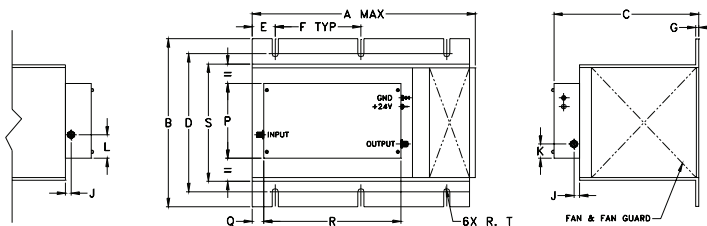

MOUNTING INFORMATION FOR MODELS WITHOUT HEATSINK.

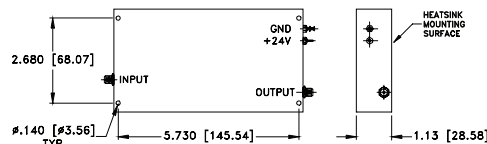

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt
9.85	7.3	6.3	6.00	1.00	3.75	.13	—	.25	.63	1.03	—	—	3.25	.5	6.00	5.1	.135	grams*
250.19	185.42	160.02	152.40	25.40	95.25	3.30	—	6.35	16.00	26.16	—	—	82.55	12.70	152.40	129.54	3.43	4185

*500 grams without heatsink









P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs & shopping online see web site

REV. C
M138727
ZHL-100W-52+
ED-12238/18
WZ/RS/CP/AM
130207
Page 1 of 2

FREQUENCY (MHz)	GAIN (dB)			DIRECTIVITY (dB)	VSWR (:1)		NOISE FIGURE (dB)	POUT at 1 dB COMPR. (dBm)	IP3 (dBm)
	22V	24V	25V		IN	OUT			
50.00	49.98	49.67	49.50	15.37	1.37	1.43	4.58	48.28	61.24
70.00	50.09	49.79	49.63	14.78	1.28	1.52	4.34	48.67	61.60
90.00	50.12	49.84	49.68	16.48	1.27	1.67	4.26	49.03	61.85
100.00	50.19	49.92	49.77	15.38	1.29	1.76	4.10	49.07	61.94
120.00	50.24	49.99	49.85	15.65	1.34	1.95	4.16	49.17	61.85
140.00	50.25	50.03	49.90	16.57	1.40	2.12	4.11	49.18	60.85
160.00	50.21	50.03	49.92	16.63	1.47	2.21	4.07	49.15	60.47
180.00	50.09	49.95	49.85	18.31	1.52	2.21	4.03	48.90	60.06
200.00	49.97	49.85	49.78	21.66	1.56	2.15	4.01	48.65	59.28
220.00	49.82	49.73	49.66	18.98	1.59	2.04	4.02	48.36	58.10
240.00	49.59	49.51	49.45	19.22	1.59	1.95	4.12	47.92	57.44
260.00	49.45	49.37	49.31	20.08	1.58	1.93	4.19	47.83	57.06
280.00	49.32	49.24	49.17	24.03	1.52	2.00	4.21	47.64	56.91
300.00	49.26	49.16	49.09	22.96	1.45	2.18	4.28	47.66	56.73
320.00	49.28	49.17	49.09	21.84	1.37	2.47	4.27	47.65	56.36
340.00	49.38	49.25	49.16	20.65	1.27	2.85	4.29	47.58	56.38
360.00	49.55	49.41	49.32	20.05	1.17	3.28	4.29	47.42	56.10
380.00	49.76	49.62	49.52	21.39	1.14	3.69	4.39	47.23	56.25
400.00	49.98	49.85	49.76	21.22	1.24	4.00	4.39	47.13	56.28
420.00	50.13	50.04	49.96	17.96	1.42	4.09	4.39	47.08	56.66
440.00	50.18	50.13	50.07	19.82	1.60	3.92	4.41	47.22	56.74
460.00	50.12	50.12	50.07	19.54	1.74	3.59	4.47	47.46	57.16
480.00	49.94	49.99	49.96	19.59	1.78	3.21	4.49	47.64	56.90
500.00	49.70	49.78	49.78	19.50	1.70	2.83	4.50	47.61	56.81

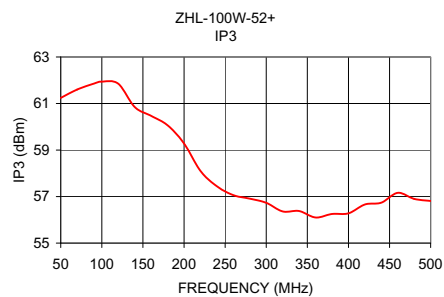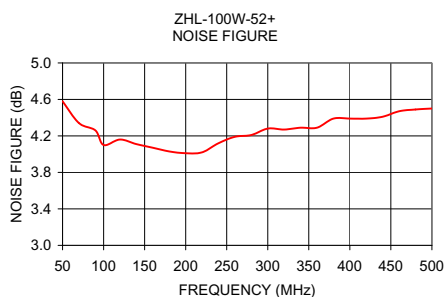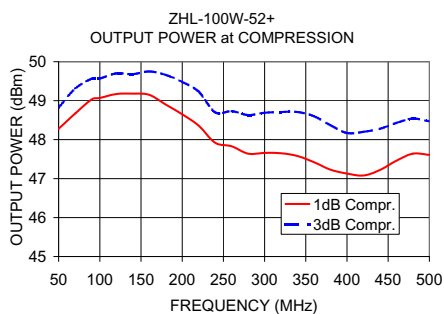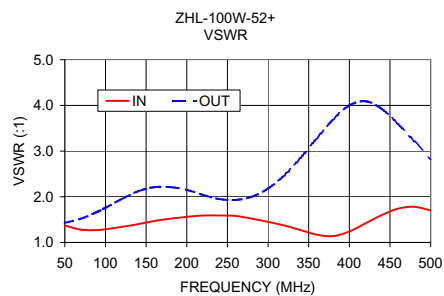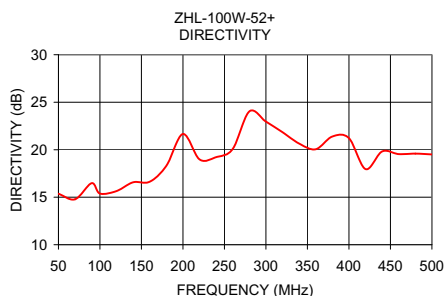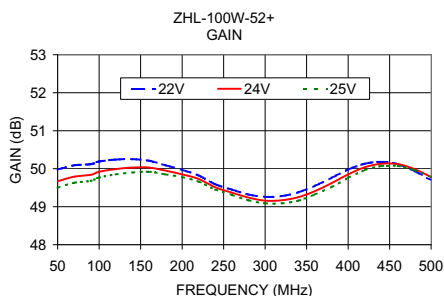

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine www.minicircuits.com Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

For detailed performance specs
& shopping online see web site