


2.92MM ATTENUATOR

2.92-CA10WXX

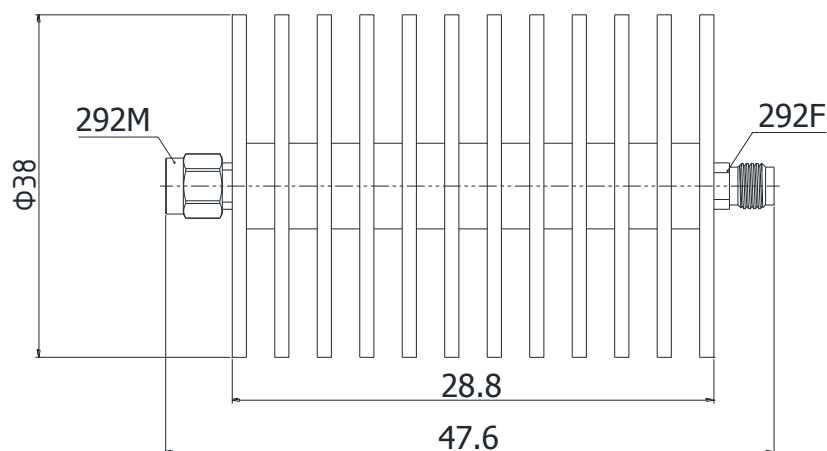

Dimensions are in mm

Configuration

Connector	2.92mm Male-Female
Connector Impedance	50 Ohms
Length	Φ 38x80;

Electrical Specifications

Product No.	Frequency (GHz)	Attenuation Value (dB)	Attenuation Accuracy (dB)	VSWR	Average Power(W)
2.92-CA10W10	DC-40	10	-1.0/+2.0	1.40	10 @25℃
2.92-CA10W20	DC-40	20	-1.0/+1.5	1.40	10 @25℃
2.92-CA10W30	DC-40	30	-1.0/+1.5	1.40	10 @25℃
2.92-CA10W40	DC-40	40	-1.0/+2.0	1.40	10 @25℃

Materials Information

Female Center Contact	CuBe Gold Plated
Male Center Contact	Brass Gold Plated
Body	Brass Gold Plated or Stainless Steel
Cavity	Aluminium(The color black)

Environmental Data

Temperature Range	-55℃ to +100℃
RoHS	Compliant