


2.92MM ATTENUATOR

2.92-CA1XX-H

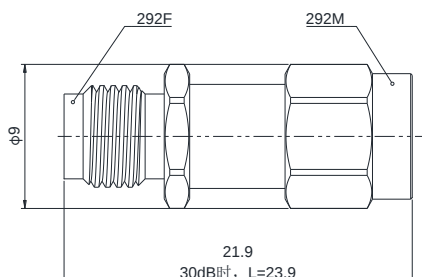

Dimensions are in mm

Configuration

Connector	2.92mm Male-Female
Connector Impedance	50 Ohms

Electrical Specifications

Product No.	Frequency (GHz)	Attenuation Value (dB)	Attenuation Accuracy (dB)	VSWR	Average Power(W)
2.92-CA101-H	DC-40	1	+/-0.8	1.25	2 @25°C
2.92-CA102-H	DC-40	2	+/-0.8	1.25	2 @25°C
2.92-CA103-H	DC-40	3	+/-0.8	1.25	2 @25°C
2.92-CA104-H	DC-40	4	+/-0.8	1.25	2 @25°C
2.92-CA105-H	DC-40	5	+/-0.8	1.25	2 @25°C
2.92-CA106-H	DC-40	6	+/-0.8	1.25	2 @25°C
2.92-CA107-H	DC-40	7	+/-0.8	1.25	2 @25°C
2.92-CA108-H	DC-40	8	+/-0.8	1.25	2 @25°C
2.92-CA109-H	DC-40	9	+/-0.8	1.25	2 @25°C
2.92-CA110-H	DC-40	10	+/-0.8	1.25	2 @25°C
2.92-CA115-H	DC-40	15	+/-0.8	1.25	2 @25°C
2.92-CA120-H	DC-40	20	+/-0.8	1.25	2 @25°C
2.92-CA130-H	DC-40	30	+/-1.0	1.25	2 @25°C

Materials Information

Female Center Contact	CuBe Gold Plated
Male Center Contact	Brass Gold Plated
Body	Stainless Steel

Environmental Data

Temperature Range	-55°C to +125°C
RoHS	Compliant