


2.92MM ATTENUATOR

2.92-CA30W30

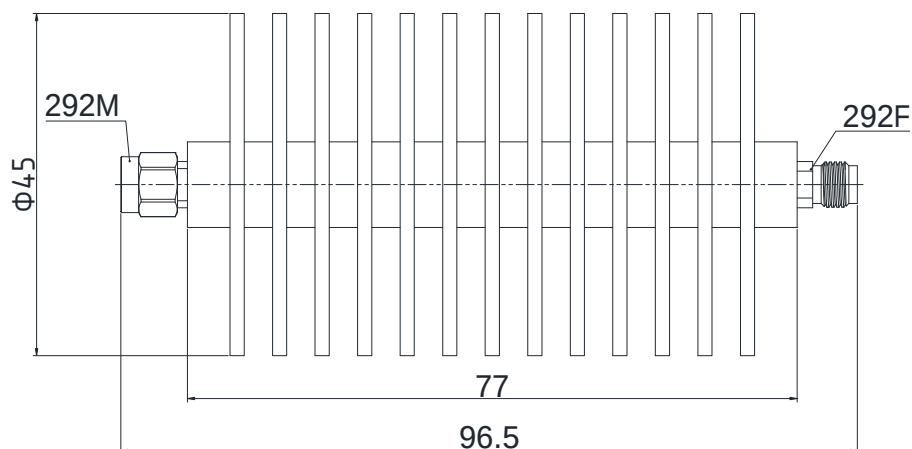

Dimensions are in mm

Configuration

Connector	2.92mm Male-Female
Connector Impedance	50 Ohms
Length	φ 45x96.5

Electrical Specifications

Product No.	Frequency (GHz)	Attenuation Value (dB)	Attenuation Accuracy (dB)	VSWR	Average Power(W)
2.92-CA30W30	DC-40	30	-1.0/+2.0	1.45	30 @25°C

Materials Information

Female Center Contact	CuBe Gold Plated
Male Center Contact	Brass Gold Plated
Body	Brass Gold Plated or Stainless Steel
Cavity	Aluminium(The color black)

Environmental Data

Temperature Range	-55°C to +100°C
RoHS	Compliant