


2.92MM ATTENUATOR

2.92-CA5XX

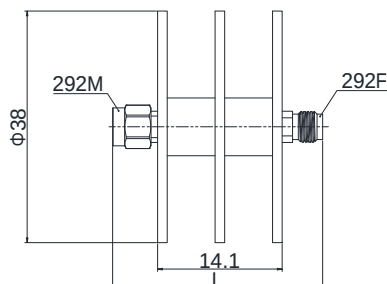

Dimensions are in mm

Configuration

Connector	2.92mm Male-Female
Connector Impedance	50 Ohms
Length	≤20dB, L=31.4; 30dB, L=33

Electrical Specifications

Product No.	Frequency (GHz)	Attenuation Value (dB)	Attenuation Accuracy (dB)	VSWR	Average Power(W)
2.92-CA501	DC-40	1	+/-1.0	1.35	5 @25°C
2.92-CA502	DC-40	2	+/-1.0	1.35	5 @25°C
2.92-CA503	DC-40	3	+/-1.0	1.35	5 @25°C
2.92-CA504	DC-40	4	+/-1.0	1.35	5 @25°C
2.92-CA505	DC-40	5	+/-1.0	1.35	5 @25°C
2.92-CA506	DC-40	6	+/-1.0	1.35	5 @25°C
2.92-CA507	DC-40	7	+/-1.0	1.35	5 @25°C
2.92-CA508	DC-40	8	+/-1.0	1.35	5 @25°C
2.92-CA509	DC-40	9	+/-1.0	1.35	5 @25°C
2.92-CA510	DC-40	10	+/-1.0	1.35	5 @25°C
2.92-CA515	DC-40	15	+/-1.0	1.35	5 @25°C
2.92-CA520	DC-40	20	-1.0/+1.5	1.35	5 @25°C
2.92-CA530	DC-40	30	-1.0/+1.5	1.35	5 @25°C

Materials Information

Female Center Contact	CuBe Gold Plated
Male Outer Contact	Brass Gold Plated
Dielectric	PEI

Environmental Data

Temperature Range	-55°C to +125°C
RoHS	Compliant