

ADAPTERS, BETWEEN-SERIES

Type N / SMA, DC - 18 GHz, Bulkhead Mount

SPECIFICATIONS:

Models: 5206

RoHS
Compliant


AEROFLEX
A passion for performance.

Electrical:

Frequency Range _____ DC - 18.0 GHz
VSWR _____
DC - 4 GHz _____ 110:1 Max.
4 - 12.4 GHz _____ 120:1 Max.
12.4 - 18 GHz _____ 130:1 Max.
Impedance _____ 50 Ohms
Operating Temp Range _____ -65°C to +125°C


Mechanical:

Connectors _____ Passivated Stainless Steel
Mates with MILSTD-348
Conductors _____ Gold Plated Beryllium Copper

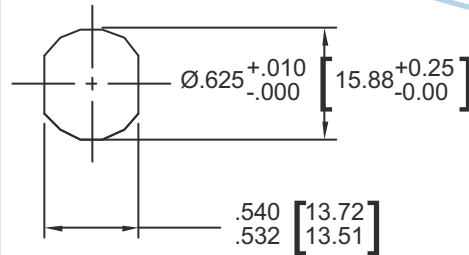

Recommended Panel
Configuration

Model Number: **5206**
Type N Male / SMA Female

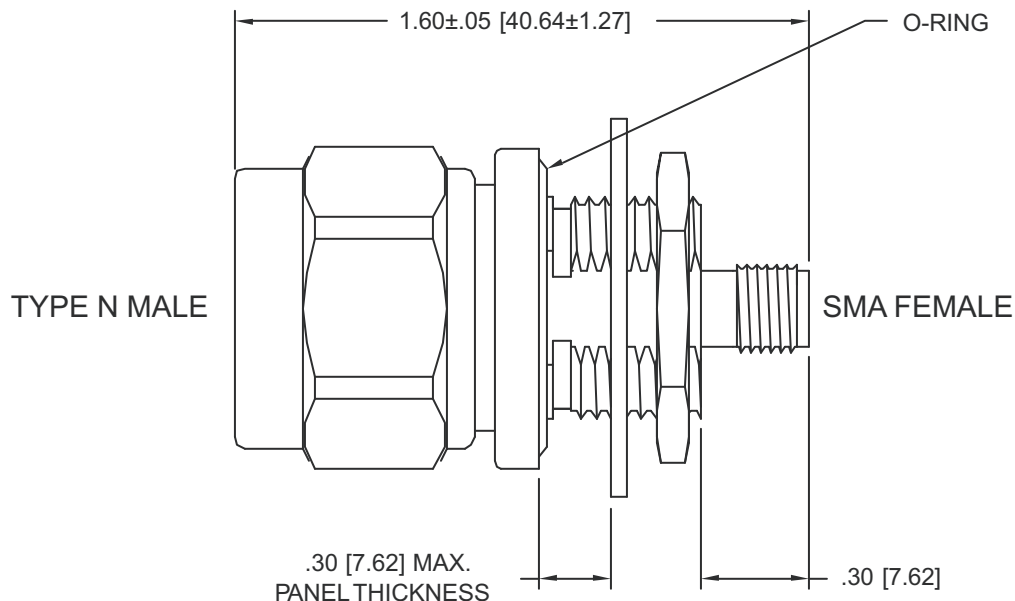

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

5206: REV -

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com