

# ADAPTERS, BETWEEN-SERIES

SMA / 3.5mm , DC - 18 GHz

## SPECIFICATIONS:

Models: 5246, 5247, 5248, 5249


**RoHS**  
Compliant

<b>Electrical:</b>	
Frequency Range	DC - 18.0 GHz
VSWR	1.25:1 Max.
Impedance	50 Ohms
Operating Temp Range	-65°C to +125°C
<b>Mechanical:</b>	
SMA Connectors	Passivated Stainless Steel
Mates with MIL-STD-348	
3.5mm Connectors	Passivated Stainless Steel
Mates both Mechanically and Electrically with all SMA, and K* Series Connectors	
Conductors	Gold Plated Beryllium Copper


\* K is a Trademark of Anritsu Corp.




Model Number: **5246**  
SMA Male to 3.5mm Male

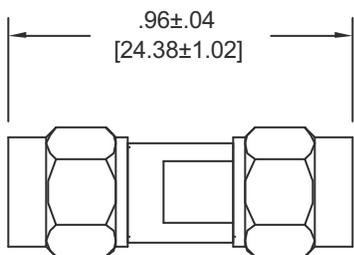


Model Number: **5248**  
SMA Female to 3.5mm Male

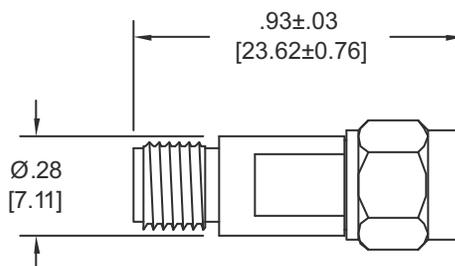

Model Number: **5247**  
SMA Male to 3.5mm Female

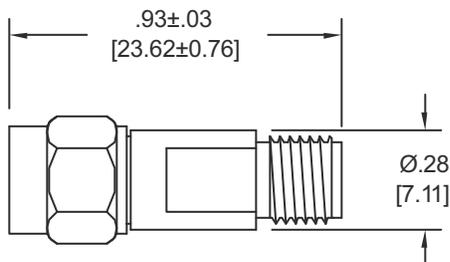

Model Number: **5249**  
SMA Female to 3.5mm Female

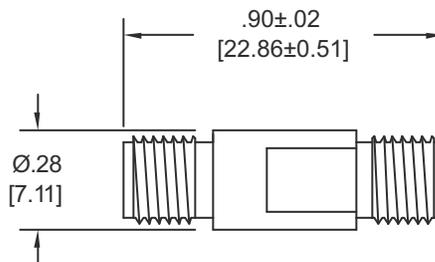

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

5246: REV -



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.  
888-244-6638 or 734-426-5553 • FAX: 734-426-5557  
www.aeroflex-inmet.com • inmet-sales@aeroflex.com