

DC BLOCKS

2.4mm, 100 MHz - 50 GHz, 75 Volts

SPECIFICATIONS:

Models: 8177, 8178, 8179

RoHS
Compliant

AEROFLEX
A passion for performance.

Electrical:

Frequency Range _____ 100 MHz - 50 GHz
Insertion Loss _____ 1.5 dB Max.
VSWR _____ 1.75:1 Max.
Impedance _____ 50 Ohms
Voltage Rating _____ 75 Volts
Operating Temp Range _____ +5°C to +75°C


Mechanical:

2.4mm Connectors _____ Gold Plated Beryllium Copper
(Mates with 1.85mm & V* Connectors)
Conductors _____ Gold Plated Beryllium Copper
Barrel & Coupling Nut** _____ Passivated Stainless Steel


** For a Gold Plated Barrel & Coupling Nut add /AU to the Model Number

*V is a trademark of Anritsu Corp.


Model Number: **8177**
Inner Only

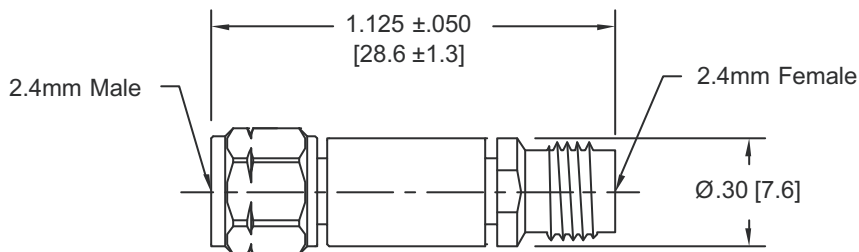

Model Number: **8178**
Outer Only

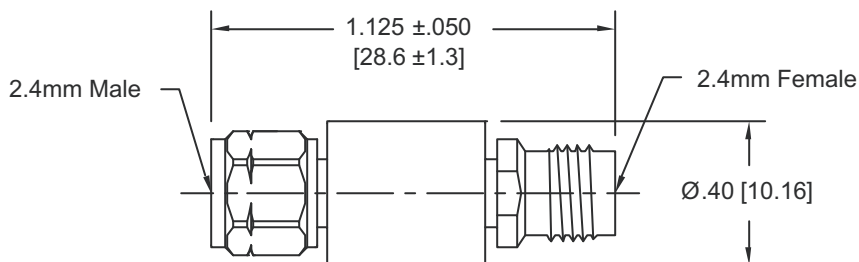

Model Number: **8179**
Inner/Outer

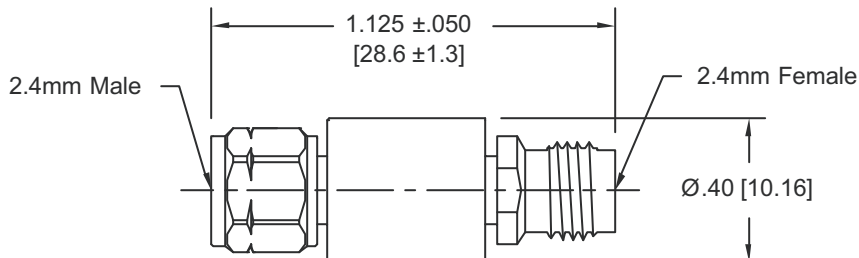

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

8177: REV C

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com