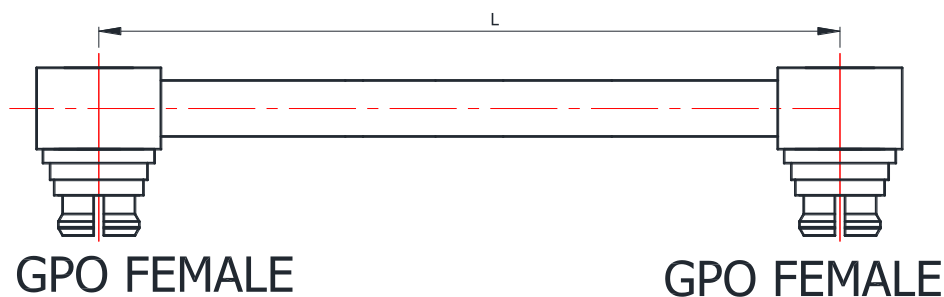


086 SERIES, FLEXIBLE CABLE,
GPO(SMP)(FEMALE)-GPO(SMP) (FEMALE)**GA712-GPWFGPWF-XXX**

* Label and Shrinking tube design depend on customer's request.

Configuration	
Connector 1 Type	GPO Female
Connector 1 Body Style	Straight
Body Material and Plating	CuBe Gold Plated
Connector 1 Mount Method	Right Angle
Connector 2 Type	GPO Female
Connector 2 Body Style	Right Angle
Body Material and Plating	CuBe Gold Plated
Connector 2 Mount Method	None
Cable Type	GUT-085-Form-FEP
Electrical Specifications	
Impedance	50 Ω
Frequency	DC to 18 GHz
Return Loss/VSWR	10dB to 18 GHz
Phase Stability vs. Flexure	N/A
Amplitude Stability	N/A
Shielding Effectiveness	<-100dB @ 1GHz
Phase Matching	On request
Signal Delay	On request
Power Handling	110watt @ 2GHz at sea level,VSWR1.0
Environmental Data	
Temperature Range	-40°C to +125°C
2002/95/EC(RoHS)	Compliant

Cable Specifications

Center Conductor	Silver plated copper
Dielectric	Solid extruded PTFE
Jacket	EPI205,Blue
Capacitance(pF/m)	94
Velocity of propagation(%)	70
Min. bending radius(mm)	6
Jacket Diameter(mm)	2.54

Part Number List

Part Number	Length [mm]	Insertion Loss ≤(dB)			
		1GHz	5GHz	10GHz	18GHz
GA712-GPWFGPWF-1000	1000±10	0.86	1.7	2.5	3.6
GA712-GPWFGPWF-800	800±8	0.73	1.4	2.06	2.94
GA712-GPWFGPWF-500	500±5	0.53	0.95	1.42	2.05
GA712-GPWFGPWF-300	300±5	0.39	0.65	0.96	1.44
GA712-GPWFGPWF-260	260±5	0.37	0.59	0.87	1.31
GA712-GPWFGPWF-200	200±5	0.33	0.51	0.74	1.12
GA712-GPWFGPWF-100	100±5	0.24	0.35	0.52	0.81

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.