

Directional Coupler

Gwave®

50Ω 2.92mm 16dB Directional Coupler(2 ~ 40G)

GDC-16-020400


Electrical Specifications

Frequency Range, GHz	2 ~ 40
Impedance, Ohms	50
Nominal Coupling[dB]	16±0.8
Frequency Flatness Max.[dB]	±0.8
Main VSWR Max.	1.7
Coupling VSWR Max.	1.7
Insertion Loss Max.[dB]	1.6
Directivity Min.[dB]	10
CW Power Max.[W]	20
Peak Power Max.[kW]	3

Mechanical Specifications

Conn.Type	2.92mm(F)
Weight Max[g]	65
Operating Range deg.[C]	-35 ~ +105
Color	Black

Outline Drawing

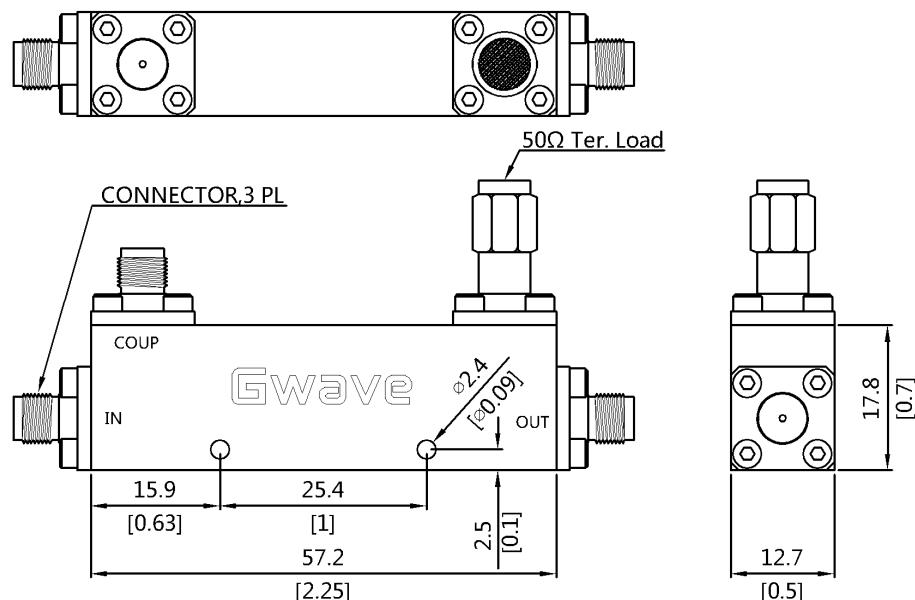

Notes

- Insert loss does not include theoretical coupling insert loss[0.11dB].
- Compliant MIL-STD-810G environment test standard.