

Hybrid Coupler

Gwave®

50Ω SMA 180 Deg. Hybrid Coupler(4 ~ 12.4G)

GHC-180-040124


Electrical Specifications

Frequency Range, GHz	4 ~ 12.4
Impedance, Ohms	50
VSWR Max.	1.5
Insertion Loss Max.[dB]	1.5
Isolation Min.[dB]	18
Amp.Bal. Max.[dB]	±0.4
Phase Bal. Max.[Deg.]	±6
CW Power Max.[W]	20
Peak Power Max.[kW]	3

Mechanical Specifications

Conn.Type	SMA(F)
Weight Max[g]	110
Operating Range deg.[C]	-55 ~ +105
Color	Black

Outline Drawing

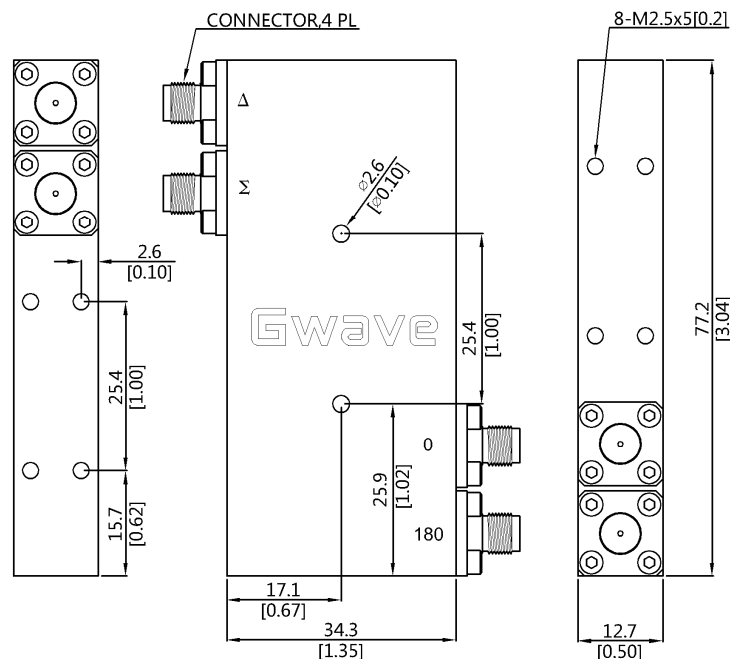

Notes

- Insert loss does not include theoretical power distribution insert loss[3dB].
- Compliant MIL-STD-810G environment test standard.