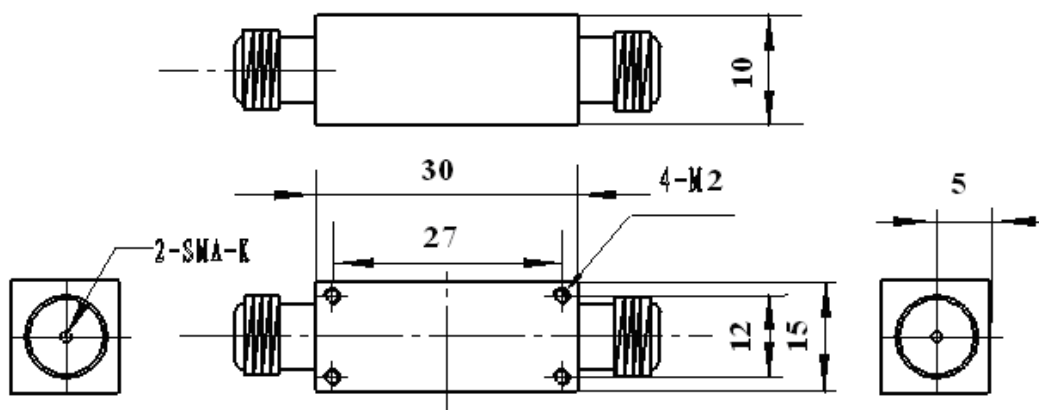


Electrical Specifications

Center Frequency, MHz	DC-50
Impedance, Ohms	50
VSWR Max.	1.5
Insertion Loss,dB	≤1
Rejection	40dB@150M-1000M

Mechanical Specifications

Conn.Type	SMA(F)
Operating Range deg.[C]	-55 ~ +85

Outline Drawing**Notes**