Power Divider/Combiner	Gwave
50Ω 16 Way SMA Power Divider(18 ~ 26.5G)	**GPD-16-180265**

Electrical Specifications

Frequency Range, GHz	18 ~ 26.5
Impedance, Ohms	50
Insertion Loss Max.[dB]	4.2
Amp.Bal. Max.[dB]	±0.6
Input VSWR Max.	1.7
Output VSWR Max.	1.7
Isolation Min.[dB]	16
Phase Bal. Max.[Deg.]	±6
CW Power Max.[W]	20
Peak Power Max.[kW]	3

Mechanical Specifications

Conn.Type	SMA(F)
Weight Max[g]	350
Operating Range deg.[C]	-35 ~ 105
Color	Black

Outline Drawing

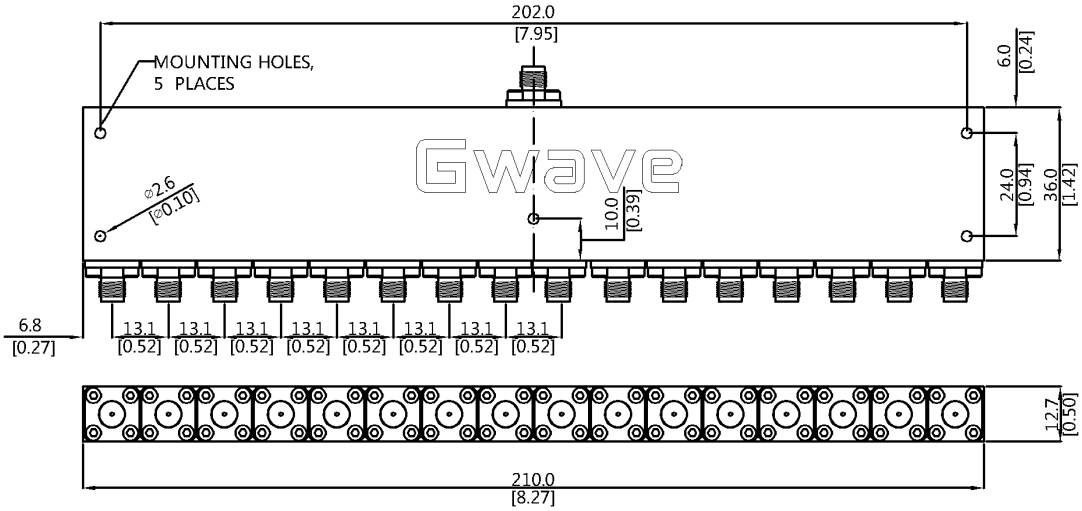

Notes

-Insert loss does not include theoretical power distribution insert loss[12dB].
-Compliant MIL-STD-810G environment test standard.

Gwave Technology Co.,Ltd.
No.33 Building,Hanjiachuan Yard,Haidian District,Beijing
China(100094) www.gwave-tech.com

Tel.: +86 10 62450051/52
Fax: +86 10 62450053
Email: gwave@gwave-tech.com