


Electrical Specifications

Frequency Range, GHz	0.4 ~ 40
Impedance, Ohms	50
Insertion Loss Max.[dB]	3.6
Amp.Bal. Max.[dB]	±0.5
Input VSWR Max.	2.0
Output VSWR Max.	2.0
Isolation Min.[dB]	13
Phase Bal. Max.[Deg.]	±7
CW Power Max.[W]	20
Peak Power Max.[kW]	3

Mechanical Specifications

Conn.Type	2.92mm(F)
Weight Max[g]	150
Operating Range deg.[C]	-35 ~ 105
Color	Black

Outline Drawing

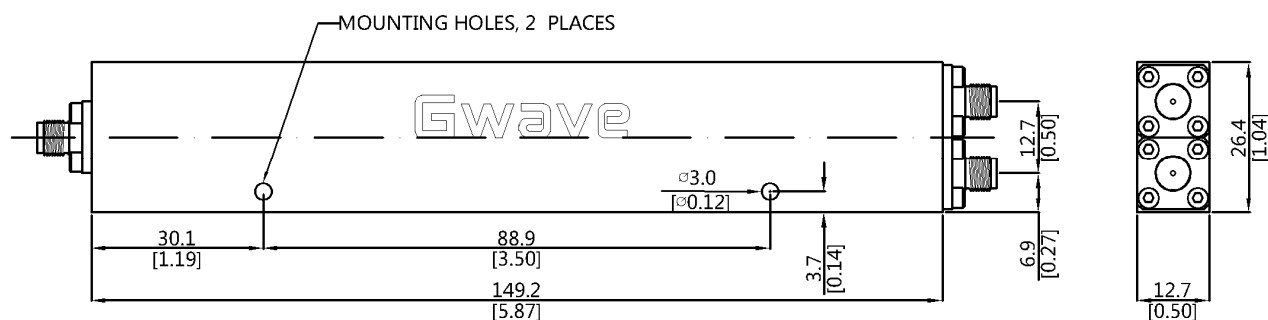

Notes

- Insert loss does not include theoretical power distribution insert loss[3dB].
- Compliant MIL-STD-810G environment test standard.