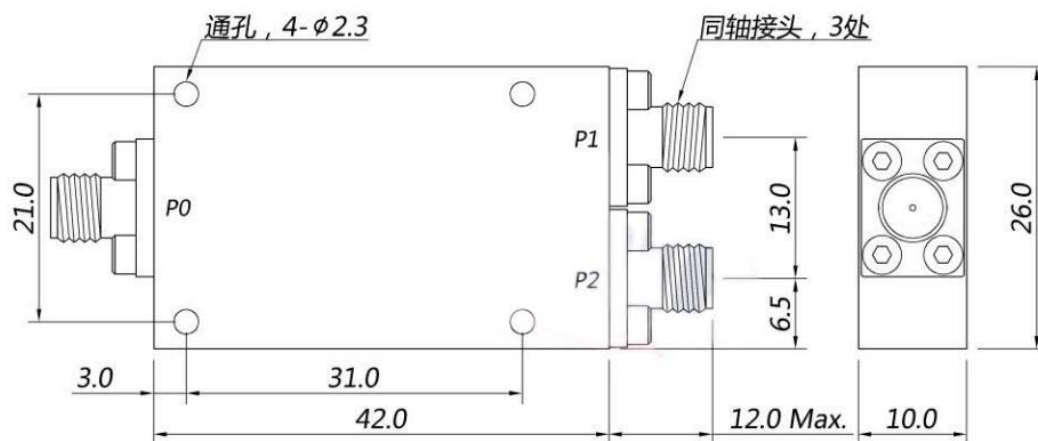


Electrical Specifications

Frequency Range, GHz	4 ~ 40
Impedance, Ohms	50
Insertion Loss Max.[dB]	1.8
Amp.Bal. Max.[dB]	±0.3
Input VSWR Max.	1.6
Output VSWR Max.	1.6
Isolation Min.[dB]	18
Phase Bal. Max.[Deg.]	±4
CW Power Max.[W]	20
Peak Power Max.[kW]	3

Mechanical Specifications

Conn.Type	2.92mm(F)
Weight Max[g]	TBD
Operating Range deg.[C]	-35 ~ 105
Color	Black

Outline Drawing**Notes**

- Insert loss does not include theoretical power distribution insert loss[3dB].
- Compliant MIL-STD-810G environment test standard.