


ATTENUATOR DATASHEET



N ATTENUATOR

N-CA10WXX-4G

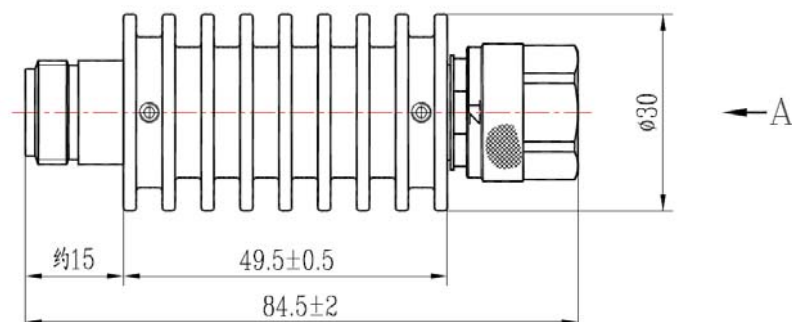

Dimensions are in mm

Configuration

Connector	N Male-Female
Connector Impedance	50 Ohms
Connector Polarity	Standard

Electrical Specifications

Product No.	Frequency (GHz)	Attenuation Value (dB)	Attenuation Accuracy (dB)	VSWR	Average Power(W)
N-CA10W01-4G	DC-18	1	± 0.4	1.20	10 @25℃
N-CA10W03-4G	DC-18	3	± 0.4	1.20	10 @25℃
N-CA10W05-4G	DC-18	5	± 0.4	1.20	10 @25℃
N-CA10W06-4G	DC-18	6	± 0.4	1.20	10 @25℃
N-CA10W10-4G	DC-18	10	± 0.4	1.20	10 @25℃
N-CA10W15-4G	DC-18	15	± 0.5	1.20	10 @25℃
N-CA10W20-4G	DC-18	20	± 0.5	1.20	10 @25℃
N-CA10W30-4G	DC-18	30	± 0.6	1.20	10 @25℃
N-CA10W40-4G	DC-18	40	± 0.7	1.20	10 @25℃

Materials Information

Female Center Contact	CuBe Gold Plated
Male Center Contact	Brass Gold Plated
Body	AL
Dielectric	PTFE

Environmental Data

Temperature Range	-55℃ to +125℃
RoHS	Compliant