


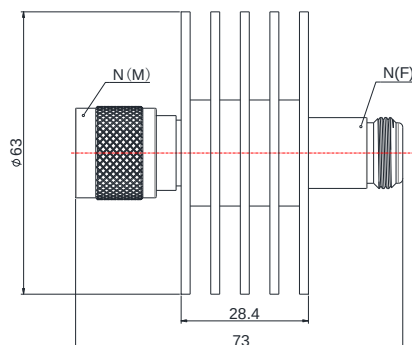

Dimensions are in mm

Configuration

Connector	N Male-Female
Connector Impedance	50 Ohms
Connector Polarity	Standard

Electrical Specifications

Product No.	Frequency (GHz)	Attenuation Value (dB)	Attenuation Accuracy (dB)	VSWR	Average Power(W)
N-CA25W10-18G	DC-18	10	+/-1.0	1.30	25 @25°C
N-CA25W20-18G	DC-18	20	+/-1.0	1.30	25 @25°C
N-CA25W30-18G	DC-18	30	+/-1.0	1.30	25 @25°C
N-CA25W40-18G	DC-18	40	+/-1.0	1.30	25 @25°C
N-CA25W50-18G	DC-18	50	-1.0/+1.5	1.30	25 @25°C
N-CA25W60-18G	DC-18	60	+/-1.0	1.30	25 @25°C
N-CA25W70-18G	DC-18	70	-1.0/+1.2	1.30	25 @25°C

Materials Information

Female Center Contact	CuBe Gold Plated
Male Center Contact	Brass Gold Plated
Body	Al
Dielectric	PTFE

Environmental Data

Temperature Range	-55°C to +125°C
RoHS	Compliant