

ADAPTERS, BETWEEN-SERIES

TNC / BNC , DC - 8 GHz

SPECIFICATIONS:

Models: 5034 5035, 5036, 5037

RoHS
Compliant

Electrical:

Frequency Range _____ DC - 8 GHz
VSWR _____ 1.30:1 Max.
Impedance _____ 50 Ohms
Operating Temp. Range _____ -65°C to +125°C

Mechanical:

TNC Connectors*

Mates with MILSTD-348

Bodies _____ Passivated Stainless Steel

Coupling Nuts _____ Nickel Plated Brass

BNC Connectors _____ Nickel Plated Brass


Mates with MILSTD-348

Conductors _____ Gold Plated Beryllium Copper


*TNC Connectors are Mode-Free up to 18GHz

AEROFLEX
A passion for performance.


Model Number: **5034**
TNC Male / BNC Male

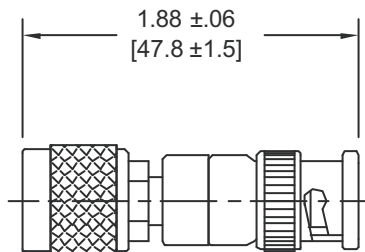


Model Number: **5036**
TNC Male / BNC Female

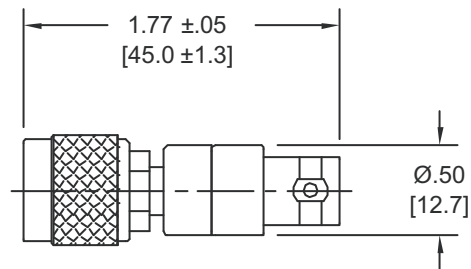

Model Number: **5035**
TNC Female / BNC Male

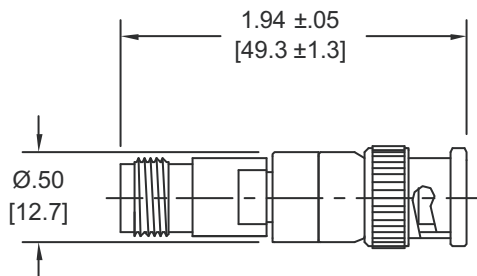

Model Number: **5037**
TNC Female / BNC Female

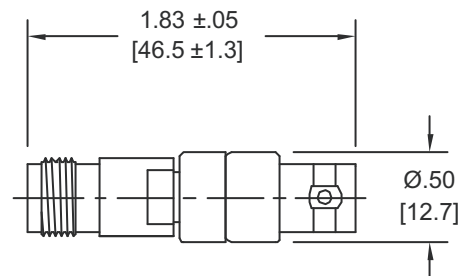

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

5034: REV C

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com