

# ADAPTERS, BETWEEN SERIES

2.4mm / 1.85mm, DC - 50 GHz



## SPECIFICATIONS:

Models: 5075, 5076, 5077, 5078



**RoHS**  
Compliant

<b>Electrical:</b>	
Frequency Range _____	DC - 50 GHz
VSWR	
DC - 18 GHz _____	1.15:1 Max.
18 - 26 GHz _____	1.25:1 Max.
26 - 50 GHz _____	1.35:1 Max.
Impedance _____	50 Ohms
Operating Temp. Range _____	-65°C to +125°C
<b>Mechanical:</b>	
2.4mm Connectors _____	Passivated Stainless Steel
Mates with 1.85mm & V* Connectors	
1.85mm Connectors _____	Passivated Stainless Steel
Mates with 2.4mm & V* Connectors	
Conductors _____	Gold Plated Beryllium Copper

\*V is a trademark of Anritsu Corp.



Model Number: **5075**  
2.4mm MALE / 1.85mm MALE

Model Number: **5076**  
2.4mm MALE / 1.85mm FEMALE

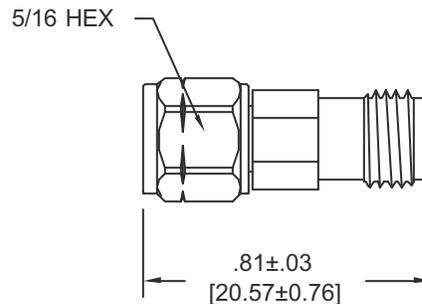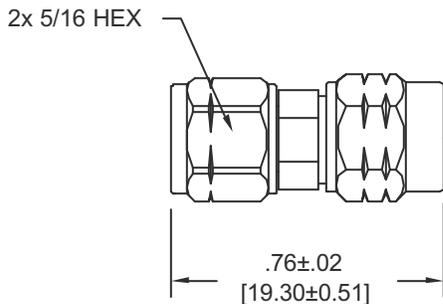

Model Number: **5077**  
2.4mm FEMALE / 1.85mm MALE

Model Number: **5078**  
2.4mm FEMALE / 1.85mm FEMALE

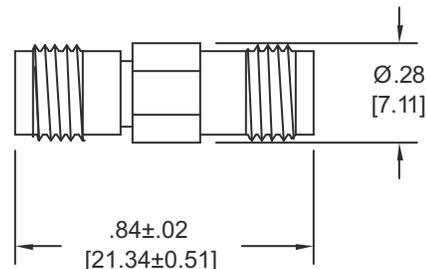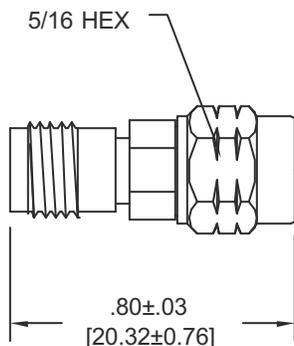

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.  
Units that offer very low return loss (VSWR) are also available.

5075: REVA



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.  
888-244-6638 or 734-426-5553 • FAX: 734-426-5557  
www.aeroflex-inmet.com • inmet-sales@aeroflex.com