

WR-15 Directional Coupler

Description:

These standard 3 ports waveguide directional couplers are traditional multi-hole directional couplers. They feature low insertion loss, flat coupling level and high directivity crossing entire waveguide band in the frequency range of 50.0 to 75.0 GHz. Bi-directional (4 ports) and dual directional (4 ports) are available under different model number.



Features:

- Broadband operation
- Low insertion loss and high directivity
- Instrumentation grade

Applications:

- Test labs
- Instrumentations
- Sub-assemblies


Device Specifications:

| Parameter | Minimum | Typical | Maximum |
|-----------------|----------|---------|----------|
| Frequency Range | 50.0 GHz | | 75.0 GHz |
| Insertion Loss | | 1.1 dB | |
| Directivity | 30 dB | | |
| VSWR | | | 1.1:1 |

*Note: The data above is for 10 dB and 20 dB coupling level. For other coupling level, contact the factory.

Ports Specifications:

| Port | Connector | Absolute Maximum Ratings |
|--------|--------------------------------------|--------------------------|
| Port 1 | WR-15 Waveguide with UG-385/U Flange | N/A |
| Port 2 | WR-15 Waveguide with UG-385/U Flange | N/A |
| Port 3 | WR-15 Waveguide with UG-385/U Flange | N/A |

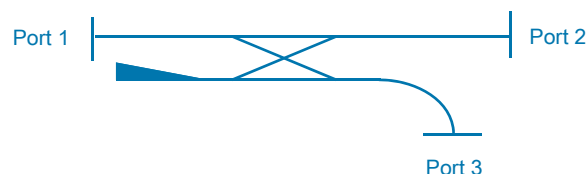


WR-15 Directional Coupler

Ordering Information:

| |
|--|
| Model Number: SWD-XX40H-15-SB |
| XX – Coupling Value (for example, SWD-0640H-15-SB means 6 dB coupling value) |

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

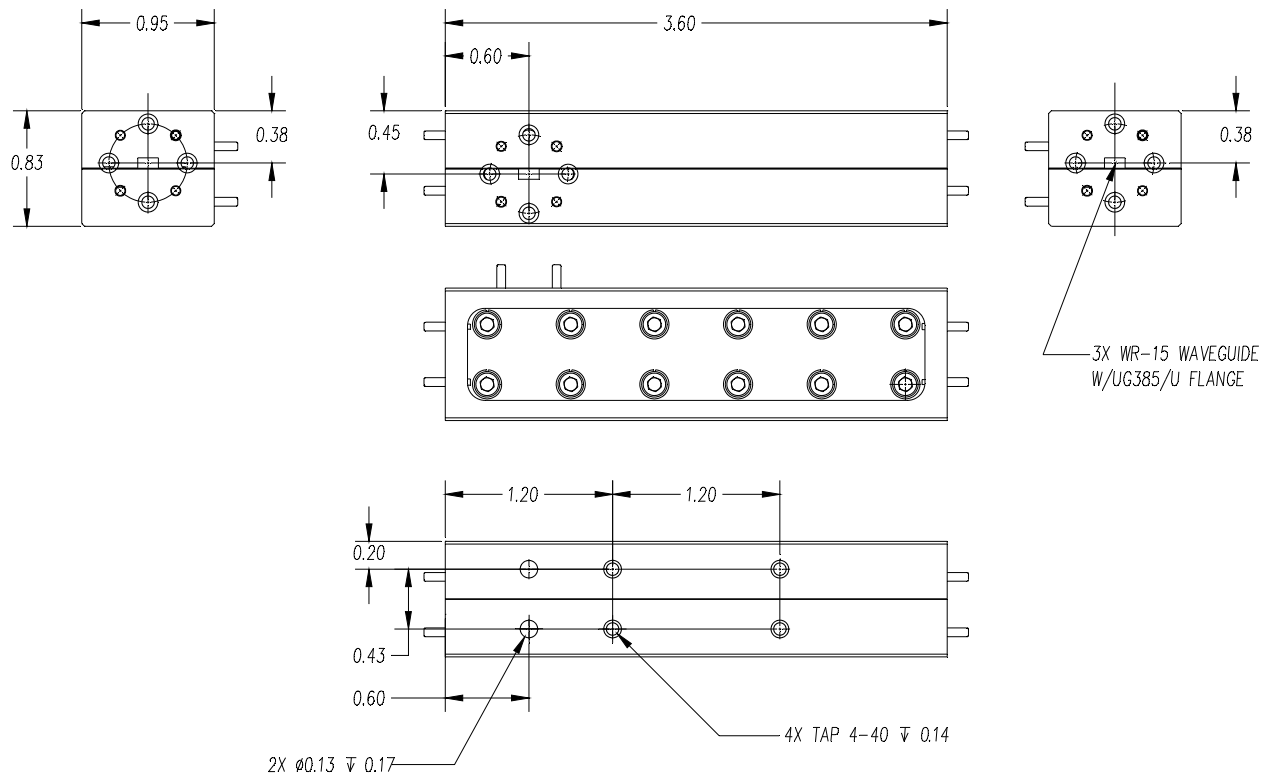

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- All data are presented using a limited sample lot, actual data may vary unit to unit.
- All testing was performed under 25°C case temperature.