

ADAPTERS, BETWEEN SERIES

TYPE N / SMA, DC - 18 GHz, PRECISION

SPECIFICATIONS:

Models: 5106, 5107, 5108, 5109

RoHS
Compliant

AEROFLEX
A passion for performance.

Electrical:

Frequency Range _____ DC - 18 GHz

VSWR

DC - 4 GHz _____ 1.04:1 Max.

4 - 8 GHz _____ 1.07:1 Max.

8 - 18 GHz _____ 1.12:1 Max.

Impedance _____ 50 Ohms

Operating Temp. Range _____ -65°C to +125°C


Mechanical:

Connectors _____ Passivated Stainless Steel


Mates with MILSTD-348

Conductors _____ Gold Plated Beryllium Copper


Model Number: **5106**
Type N Male / SMA Male

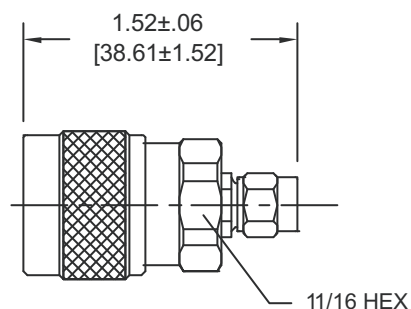


Model Number: **5108**
Type N Male / SMA Female

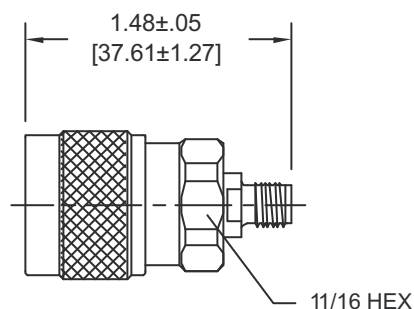

Model Number: **5107**
Type N Female / SMA Male

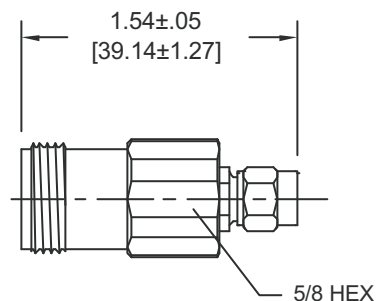

Model Number: **5109**
Type N Female / SMA Female

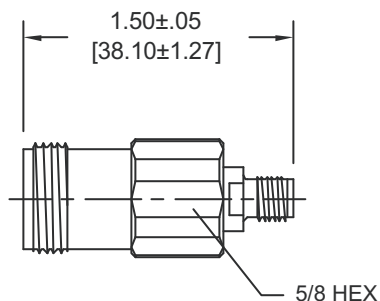

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Units that offer very low return loss (VSWR) are also available

5106; REV C

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com