

ADAPTERS, In SERIES

Type F, DC - 3 GHz, 75 Ohm

SPECIFICATIONS:

Models: 5230, 5231 & 5232

Electrical:

Frequency Range _____ DC - 3 GHz
VSWR _____

DC - 1 GHz _____ 1.15:1 Max.

1 - 2 GHz _____ 1.20:1 Max.

2 - 3 GHz _____ 1.30:1 Max.

Impedance _____ 75 Ohms

Operating Temp Range _____ -65°C to +125°C

Mechanical:



Connectors _____ Nickel Plated Brass

Conductors _____ Nickel Plated Brass &
Gold Plated Beryllium Copper




Model Number: **5230**
Male/Female Connectors


* K is a Trademark of Anritsu Corp.

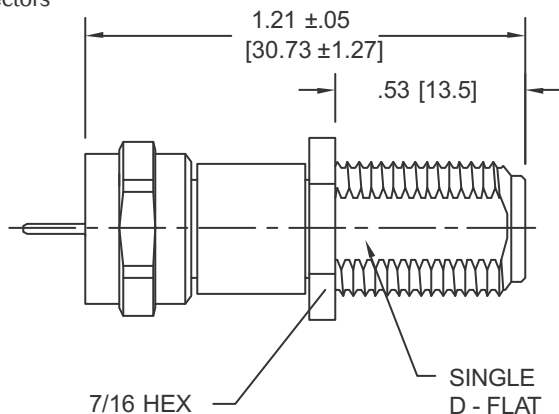

Model Number: **5231**
Male/Male Connectors

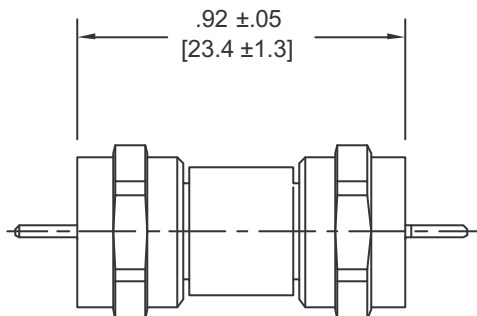

Model Number: **5232**
Female/Female Connectors

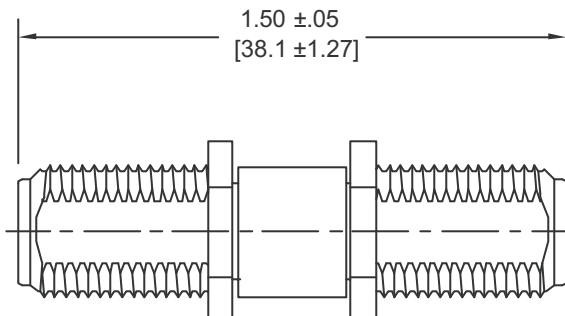

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

5230: REV E



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@aeroflex.com