

ATTENUATORS


TNC, up to 12.4 GHz, 2 Watts

SPECIFICATIONS:

Models: 9036-XX, 9042-XX, 9043-XX

RoHS
Compliant

Electrical:	
Frequency Range _____	DC - 12.4 GHz
Standard Frequency Values _____	2.5, 12.4 GHz
Standard dB Values* _____	0 - 10, 12, 15, 20, 30 & 40 dB
Attenuation Accuracy _____	In 1 dB Increments
0 - 6 dB _____	±0.3 dB
7 - 20 dB _____	±0.5 dB
21 - 30 dB _____	±0.75 dB
40 dB _____	±1.0 dB
VSWR	
DC - 4 GHz _____	1.15:1 Max
4 - 8 GHz _____	1.20:1 Max
8 - 12.4 GHz _____	1.25:1 Max
Input Power _____	2 Watts Avg. @ +25°C
	Derated Linearly to 0.5 Watts @ +125°C
Peak Power _____	250 Watts Max.
	(5uSec Pulse, .05% Duty Cycle)
Impedance _____	50 Ohms
Operating Temp. Range _____	-65°C to +125°C
Mechanical:	
TNC Connectors _____	Nickel Plated Brass
	Mate IAW MIL-STD-348
Conductors _____	Gold Plated Beryllium Copper or Brass

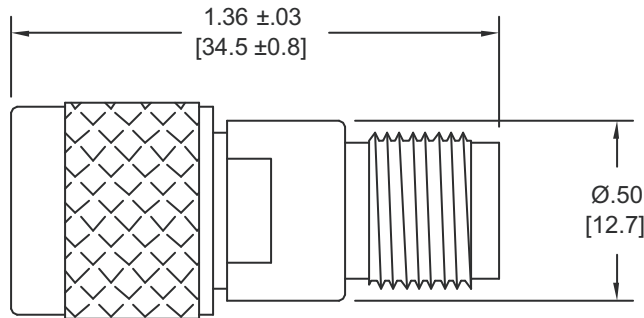

HOW TO ORDER:

Model Number: **90XX-XX**

Frequency Range _____ dB Value
 36 = DC - 12.4 GHz
 42 = DC - 2.5 GHz

Ordering Examples:

Model Number: **9036-20**
 DC-12.4 GHz, 20 dB; TNC - Male/Fem

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
 *Other dB values, units that operate over a more specific band and/or offer very low return loss (VSWR) are also available.

9036: REV G (M)



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
 888-244-6638 or 734-426-5553 • FAX: 734-426-5557
 www.aeroflex-inmet.com • inmet@aeroflex.com