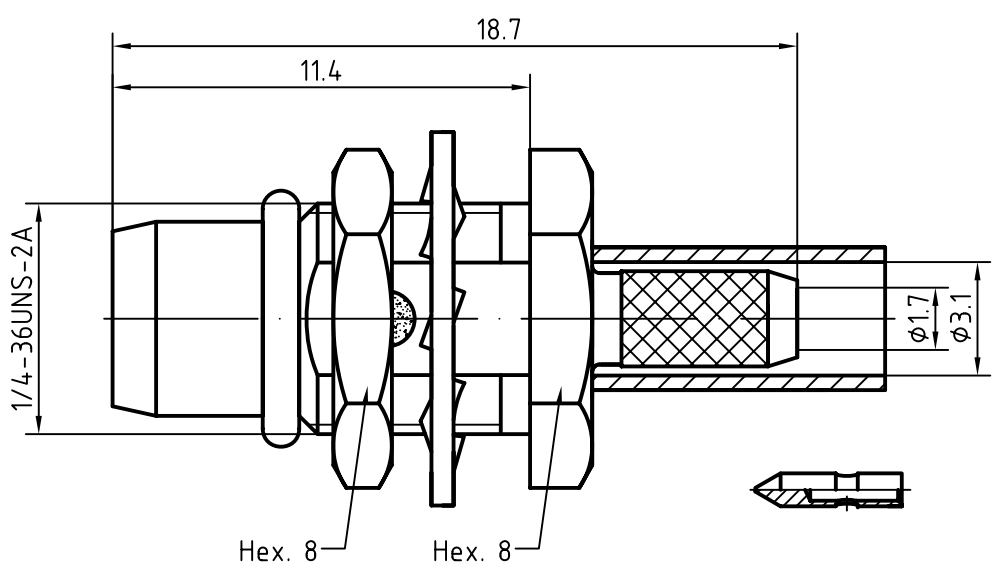


6	1	O ring	Silicon rubber	
5	1	Gasket	Phosphor bronze/Gold plated	
4	1	Nut	Brass/Gold plated	
3	1	Body	Brass/Gold plated	
2	1	Insulator	PTFE	
1	1	Center contact	Beryllium bronze/Gold plated	
Itemref	Quantity	Title/Name, designation, material, dimension etc		Article No./Reference

CHARACTERISTICS

DESCRIPTION:

BMA male BH connector

Electrical data:

Impedance:	50 ohm
Frequency range:	DC to 6GHz
VSWR:	$1.08+0.03f(\text{GHz})$ For RG316
Insertion loss:	$\leq 0.08 \sqrt{f(\text{GHz})}$ dB
Insulation resistance:	$\geq 5000\text{M}\Omega$
Test voltage:	375 V/50Hz For RG316
Contact resistance:	
1). Centre contact:	3.0 m Ω
2). Outer conductor:	2.0 m Ω

Environmental data:

Temperature rating:	-55 °C to 165 °C
2002/95/EC (RoHS):	Compliant

Mechanical data:

Mating cycles:	≥ 500
----------------	------------

Suitable cables:

RG174/U, RG188A/U, RG316/U



XAHONOR Scien-tech Co.,Ltd

Tel: 0086-029-88728563

Fax: 0086-029-88728183

E-mail: sales@xahonor.com

Http://www.xahonor.com