


# Maswell Fiberglass Antenna 800MHz /1400MHz/2400MHz Triple Bands SMA Male

**AN.FG.800.1400.2400.RA-SMA**



## Mechanical Dimension

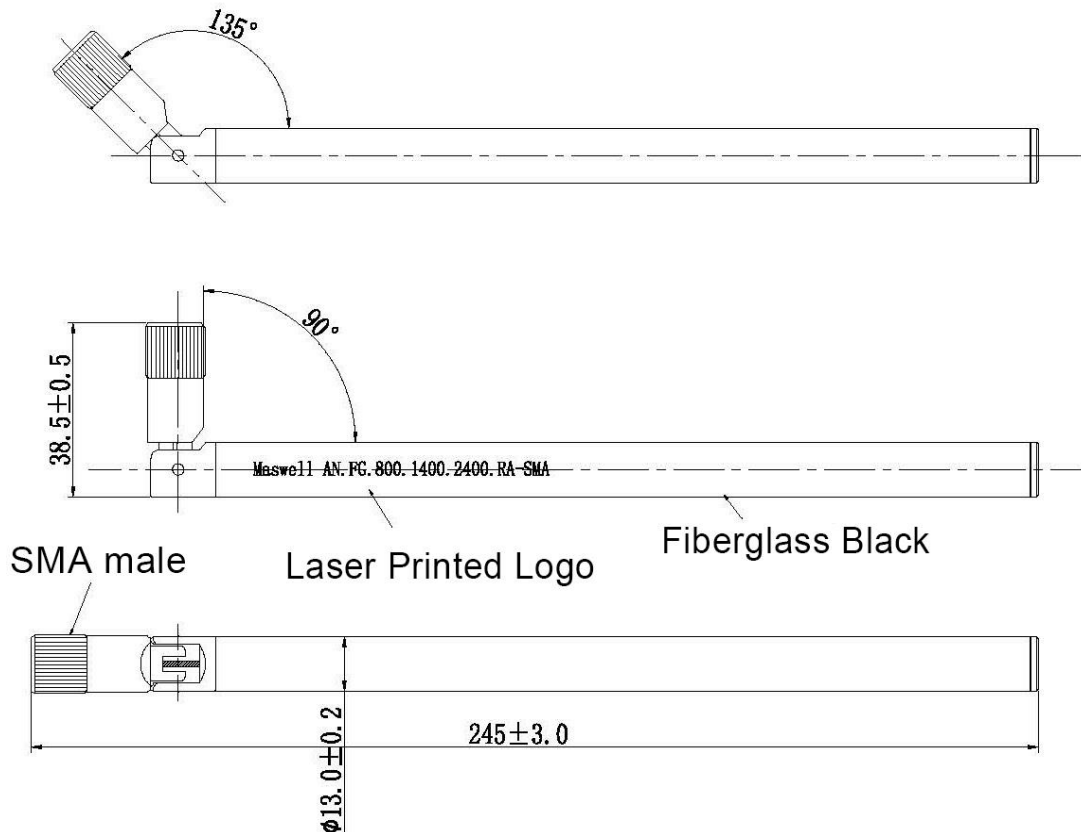

# Maswell Fiberglass Antenna 800MHz /1400MHz/2400MHz Triple Bands SMA Male

**AN.FG.800.1400.2400.RA-SMA**


## Specifications

Item		Specifications
Antenna	Frequency Range	806-825 MHz /1400-1550MHz/2400-2500MHz
	Gain	3dBi
	Impedance	50 Ohm
	Efficiency	>70%
	Polarization	Line
	V.S.W.R	<2
Mechanical	Dimension	245mm*14mm
	Antenna Color	Black
	Radome Material	Fiberglass
	Connector Type	SMA Male
Environmental	Operating Temperature	-40°C~+85°C
	Storage Temperature	-40°C~+85°C
	Water Proof	Yes
	Dust Proof	Yes
	Anti-corrosion	Yes
	Environmentally Friendly	ROHS Compliant

# Maswell Fiberglass Antenna 800MHz /1400MHz/2400MHz Triple Bands SMA Male

**AN.FG.800.1400.2400.RA-SMA**





## S11 Test Performance

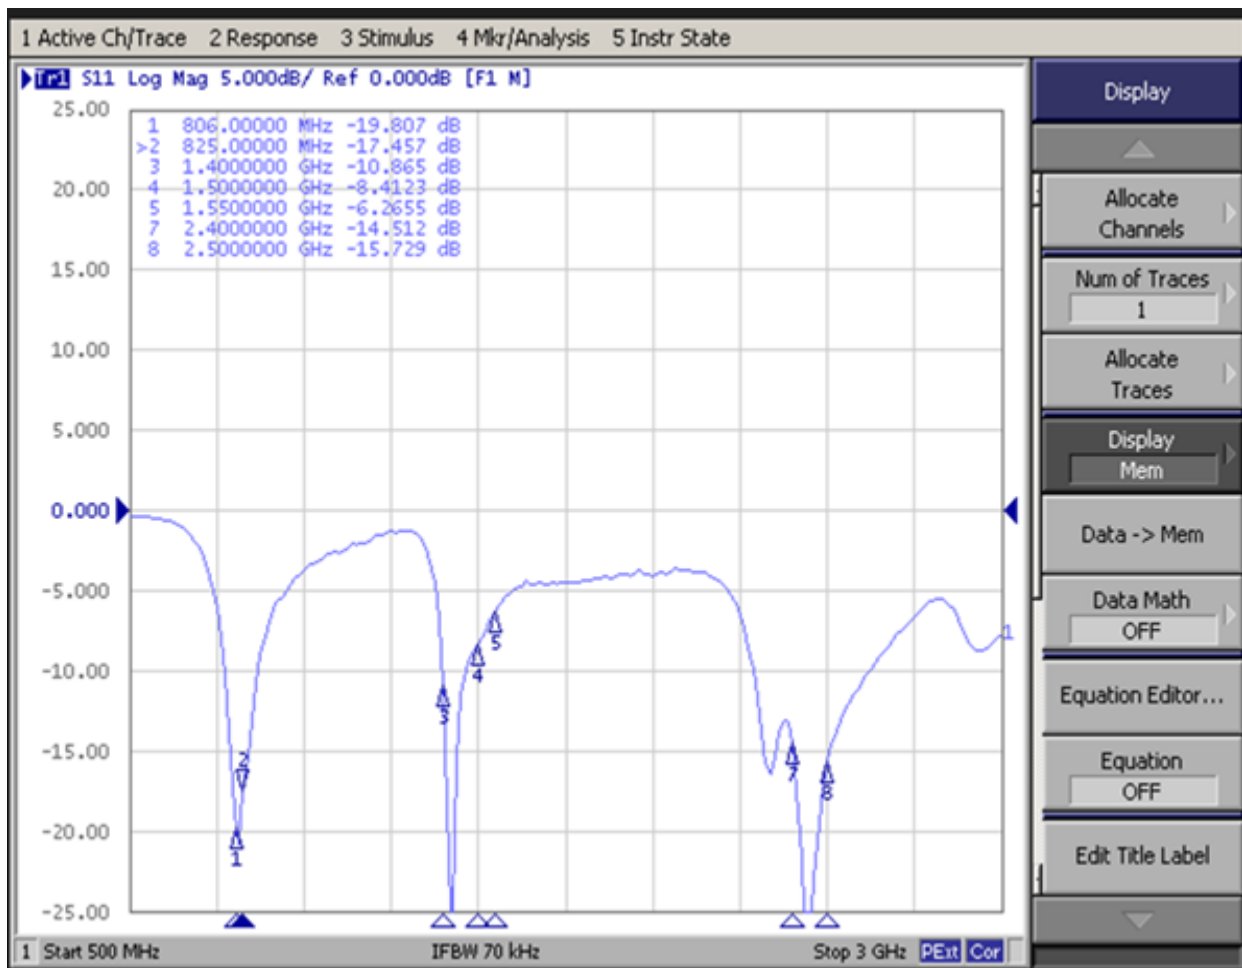

## Maswell Fiberglass Antenna 800MHz /1400MHz/2400MHz Triple Bands SMA Male

**AN.FG.800.1400.2400.RA-SMA**

Radiation Pattern: 800MHz /1400MHz/2400MHz

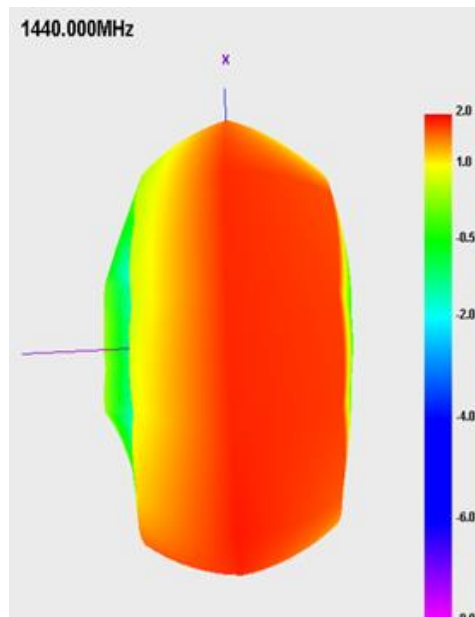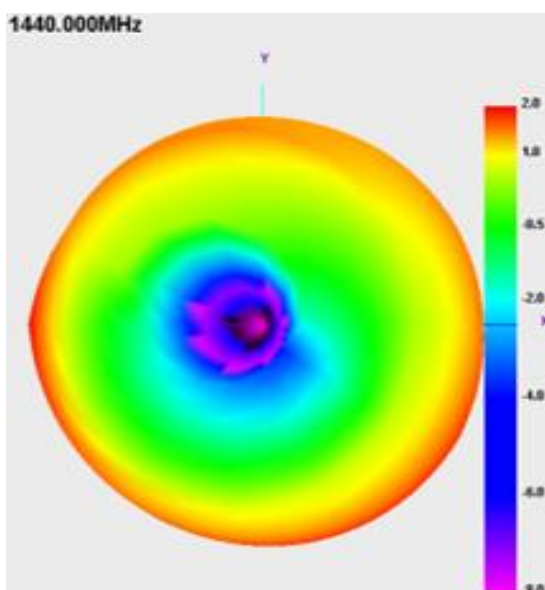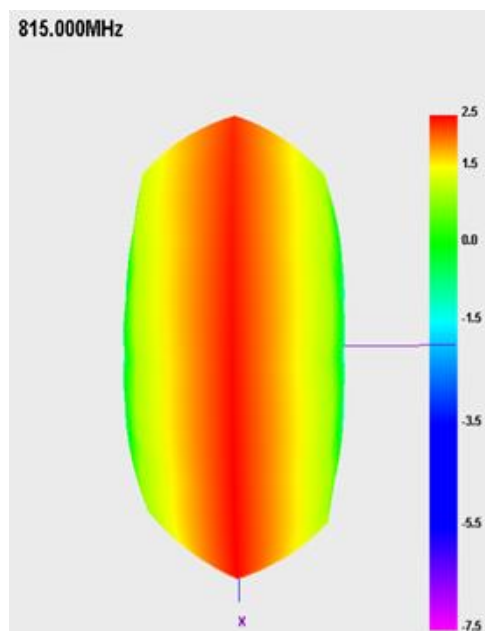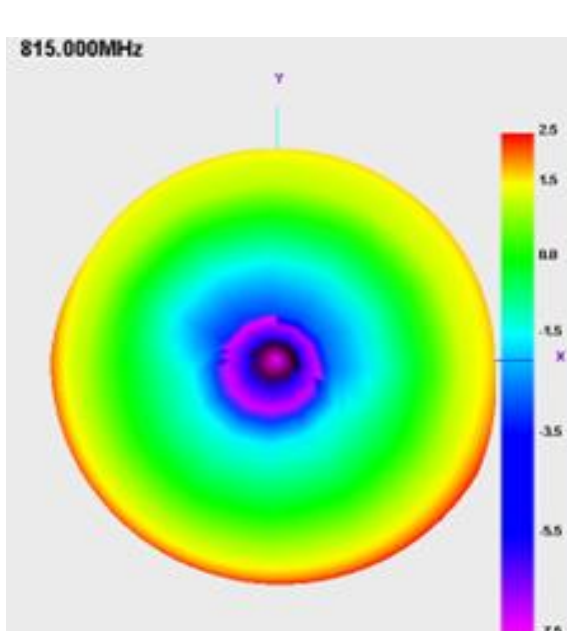

## Maswell Fiberglass Antenna 800MHz /1400MHz/2400MHz Triple Bands SMA Male

**AN.FG.800.1400.2400.RA-SMA**

Radiation Pattern: 800MHz /1400MHz/2400MHz

