



## Maswell 4x4 5G MIMO Antenna Screw Mount 617-960MHz/1710-5000MHz

AN\_Combo\_607-4C

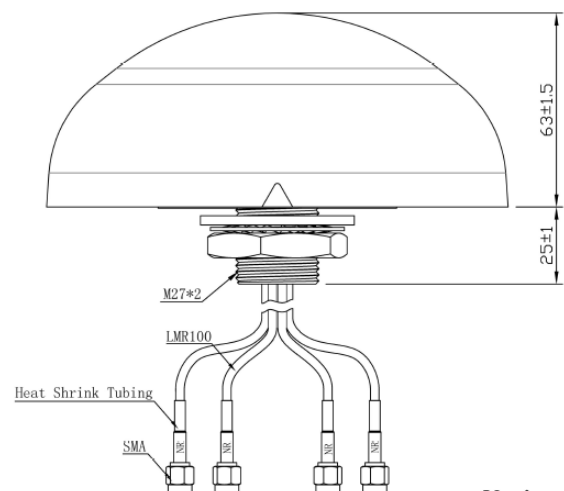

### Mechanical dimension

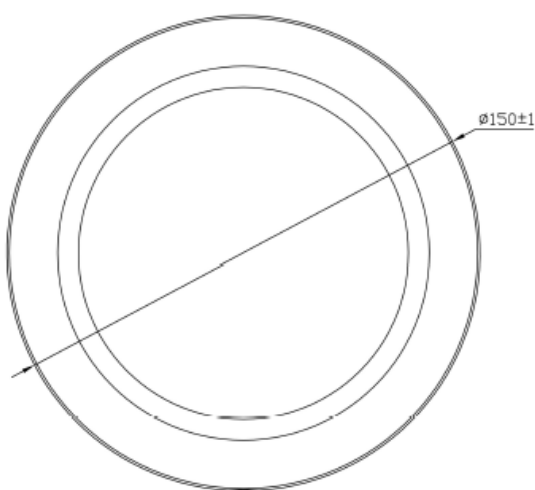

Unit:mm

# Maswell 4x4 5G MIMO Antenna Screw Mount 617-960MHz/1710-5000MHz

AN\_Combo\_607-4C

## Specifications

| Item                                          |                          | Specifications                            |
|-----------------------------------------------|--------------------------|-------------------------------------------|
| 5G NR Antenna 4x4 MIMO<br>Antenna 1—Antenna 4 | Frequency Range          | 617-960MHz/1710-5000MHz                   |
|                                               | V.S.W.R                  | <3.0                                      |
|                                               | Polarization             | Linear                                    |
|                                               | Gain                     | 3dBi                                      |
|                                               | Impedance                | 50Ω                                       |
| Mechanical                                    | Cable                    | LMR100*4, 2 meters                        |
|                                               | Connector                | SMA male                                  |
|                                               | Radome Material          | PC                                        |
|                                               | Mounting Method          | Screw                                     |
| Environmental                                 | Operating Temperature    | -40℃~+85℃                                 |
|                                               | Relative Humidity        | Up to 95%                                 |
|                                               | Ingress Protection       | IP67(exclude cable outlet)                |
|                                               | Vibration                | 10 to 55Hz with 1.5mm amplitude<br>2hours |
|                                               | Environmentally Friendly | ROHS Compliant                            |