


2 Combo Antenna 4G LTE and GPS Screw And Adhesive Mount

AN_GPS_LTE_305-Screw Fakra



Antenna Mechanical Dimension

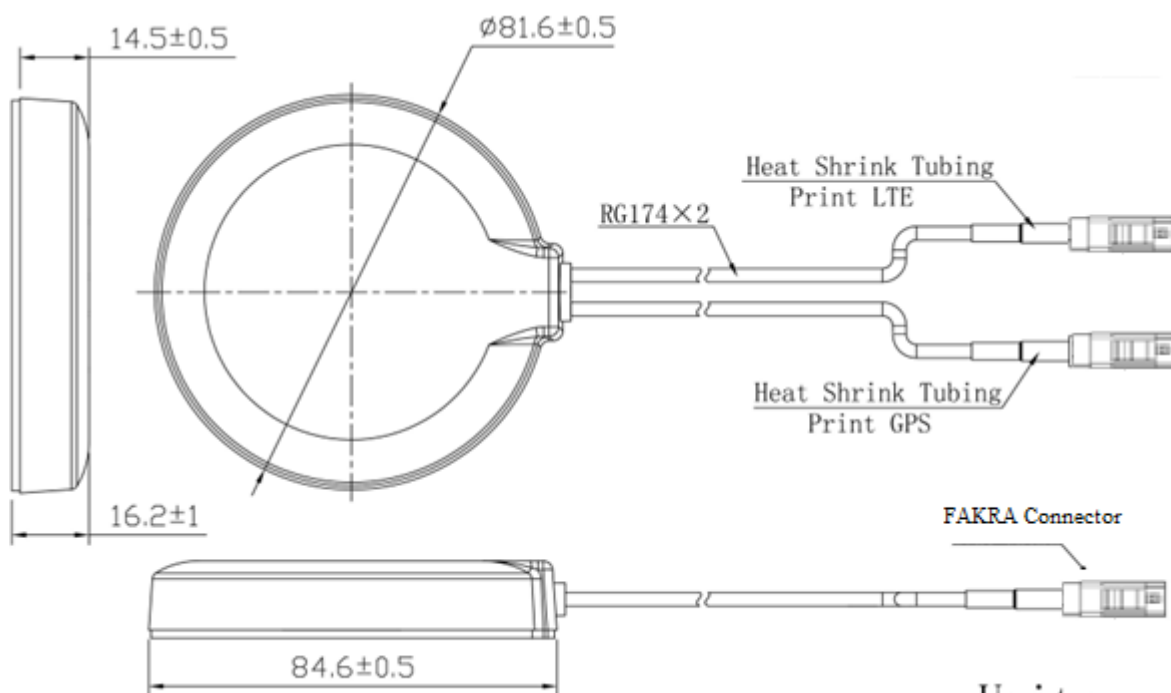

2 Combo Antenna 4G LTE and GPS Screw And Adhesive Mount

AN_GPS_LTE_305-Screw Fakra

Specifications




Item			Specifications
GPS Antenna	Dielectric Antenna	Center Frequency	1575.42±3MHz
		Band Width	CF±5MHz
		Polarization	RHCP
		Gain	2dBic（Zenith）
		V.S.W.R	<1.5
		Impedance	50Ω
		Axial Ratio	3dB（max）
	LNA	Gain	28±2dB
		Noise Figure	<1.5dB
		V.S.W.R	<2.0
Supply Voltage		2.2~5V DC	
Current Consumption		<15mA	
LTE Antenna		Frequency Range	698~960MHz/1710~2690MHz
		V.S.W.R	<3.0
		Polarization	Linear
		Gain	2.5dBi
		Impedance	50Ω
Mechanical		Cable	RG174 3m for GPS 3m for 4G
		Connector	GPS: Fakra Blue 4G Fakra Purple
		Material	ABS
		Mounting Method	Screw M6.5 and 3M Adhesive
Environmental		Operating Temperature	-40℃~+85℃
		Relative Humidity	Up to 95%
		Ingress Protection	IP67
		Vibration	10 to 55Hz with 1.5mm amplitude 2hours
		Environmentally Friendly	ROHS Compliant

2 Combo Antenna 4G LTE and GPS Screw And Adhesive Mount

AN_GPS_LTE_305-Screw Fakra

Radiation Patterns

GPS Antenna

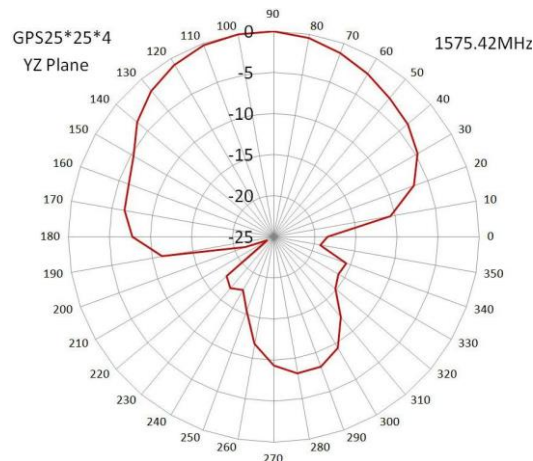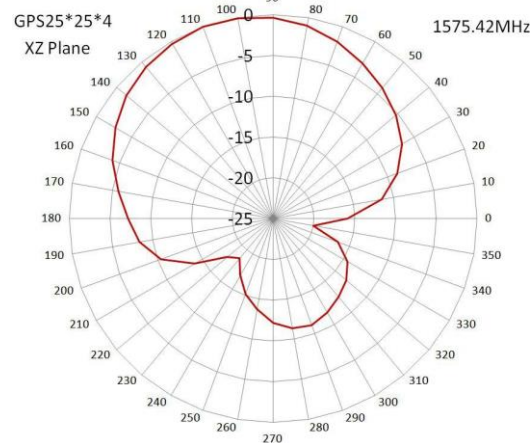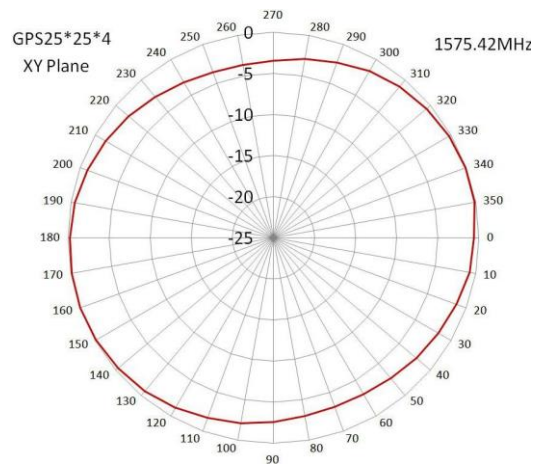

2 Combo Antenna 4G LTE and GPS Screw And Adhesive Mount

AN_GPS_LTE_305-Screw Fakra

Radiation Patterns

LTE Antenna

