
## ADAPTOR DATASHEET



## 90° Waveguide Twist Adaptor

## WR10-UG-387U-EH-1IN

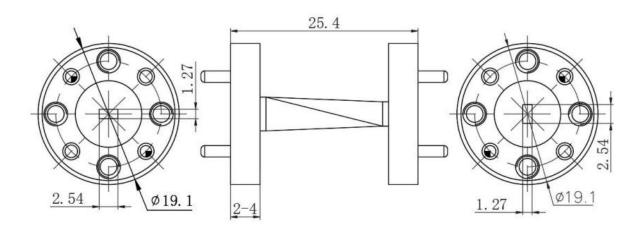

## \*Dimensions are in mm

Configuration	
Waveguide Type	WR-10(BJ900)
Flange	FUGP900(UG-387/U-M)
Body Style	Straight
<b>Electrical Specificat</b>	ions
Frequency	75 to 110 GHz
Insertion Loss (dB)	≤ 0.2
VSWR /Return Loss	1.2
<b>Materials Informati</b>	on
Body Material	Brass
Body Plating	Glod
Weight(g)	20
<b>Environmental Data</b>	<u> </u>
2011/65/EU(RoHS)	Compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Inc. 4<sup>th</sup> Floor,New Material Plaza,Yongfeng Hi-Tech Base,Haidian District,Beijing ,China(100094) www.gwave-tech.com Tel.: +86 10 86484190 Fax: +86 10 86484190-0 email: gwave@gwave-tech.com Page

1/1