


WR-137 to SMA Female Right Angle Waveguide to Coax Adapters with UDR70 Flange, 5.38-8.17GHz

## WR137/SMA-UDR70-K-V

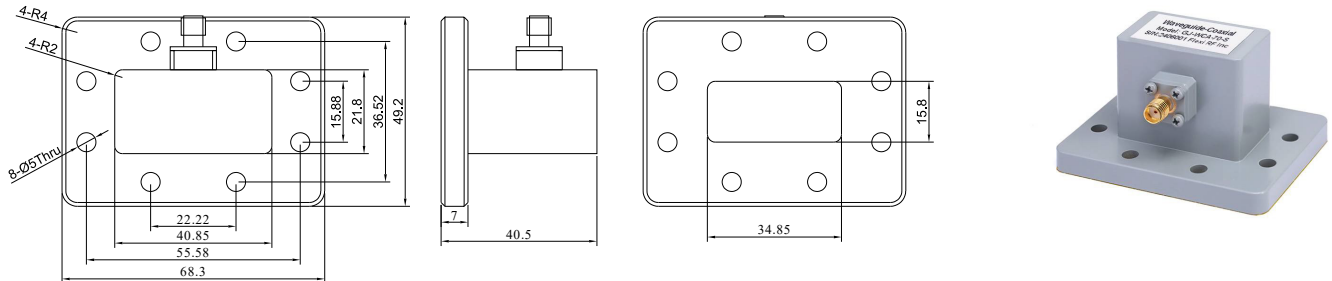

Dimensions are in mm

### Product Configuration

Body Style	Right Angle
Flange Designation	UDR70
Waveguide Size	WR-137
Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

### Electrical Specifications

VSWR	1.25
Frequency Range	5.38-8.17GHz

### Mechanical Data

Weight	92.8
Body Material	Aluminum

### Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C

NOTE: information herein is believed by Gwave to be accurate. However, Gwave assumes no responsibility for any omissions or errors in accuracies for its use or for any infringements of patents or other rights of third parties that may result from its use. Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty, including any warranty of merchantability or fitness for a particular purpose.