
## Waveguide to Coax Adapters

Gwave

WR-28 to 2.92mm Female Right Angle Waveguide to Coax Adapters with UBR320 Flange, 26.5-40GHz

## WR28/2.92-UBR320-K-V



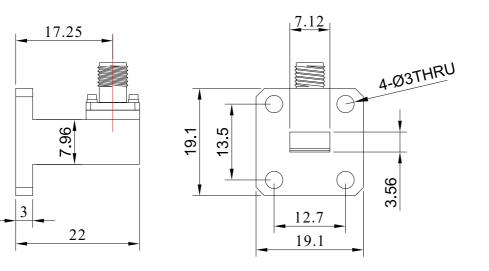

Dimensions are in mm

Product Configuration	
Body Style	Right Angle
Flange Designation	UBR320
Waveguide Size	WR-28
Connector Series	2.92mm
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50
Electrical Specifications	
VSWR	1.25
Insertion Loss	≤0.25
Frequency Range	26.5-40GHz

Mechanical Data	
Weight	12.3
Body Material	Brass

Enviromental Specifications	
RoHS Compliant	Yes
Operating Temperature Range	-30 °C to +70 °C

NOTE:information herein is believed by Gwave to be accurate. However, Gwave assumes no responsibility for any omissions or errors inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use. Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty, including any warranty of merchat ability or fitness for a particular purpose.