

Probe DATASHEET



GS 50Ω, 2.4mm Connector,
DC-50GHz,150μm

GPB50-GS-150



Electrical Specifications

Frequency Range (GHz)	DC ~ 50
Impedance (Ω)	50
Insertion Loss (dB)	<1.7
Return Loss (dB)	>12
Tip Configuration	GS
Pitch (μm)	150
Tip Width (μm)	30
Overtravel (μm)	20-60
Skating Distance (μm)	10-30

Mechanical Specifications

Connector Type	2.4mm Female
Operating Temperature	-40°C~+175°C
Tip Material	Nickel Alloy

Outline Drawing

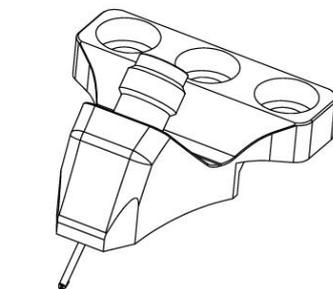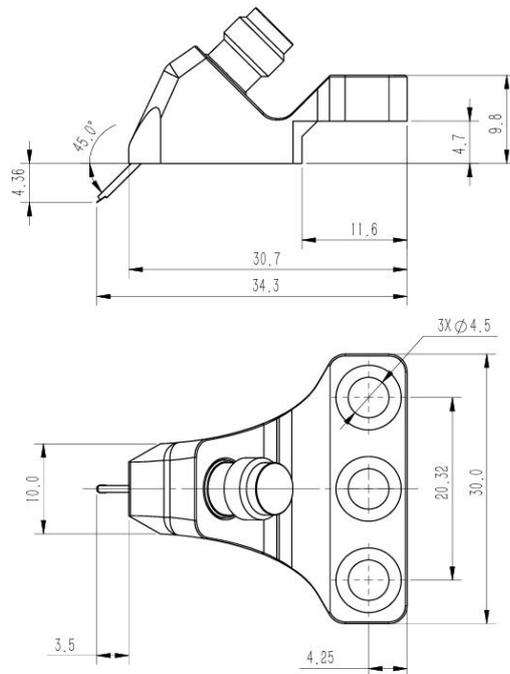

Dimensions are in mm

Probe DATASHEET




GS 50Ω, 2.4mm Connector,
DC-50GHz,150μm

GPB50-GS-150


Test data

S11 FORWARD REFLECTION

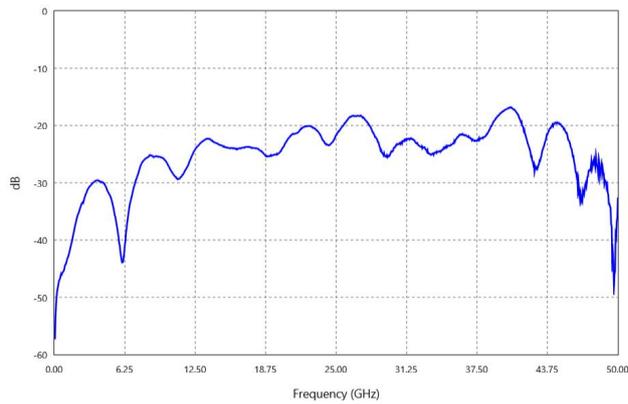

Minimum return loss for this probe is -14.98dB

S21 FORWARD TRANSMISSION

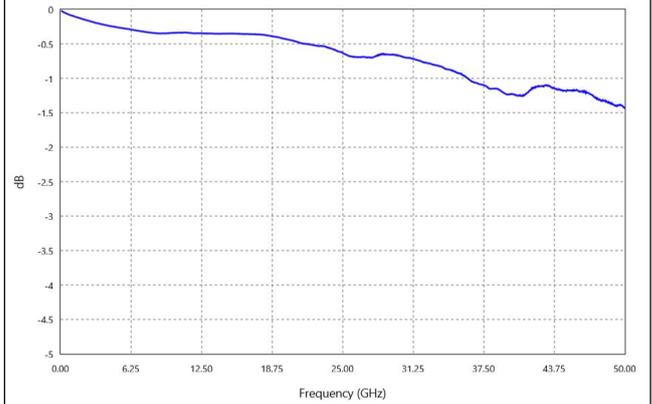

Maximum insertion loss for this probe is -1.44dB