


047 SERIES, SEMI-FLEX CABLE,  
GPPO(MINI-SMP)(FEMALE)-  
GPPO(MINI-SMP)(FEMALE)

**GA702-GPPFGPPF-XXX**

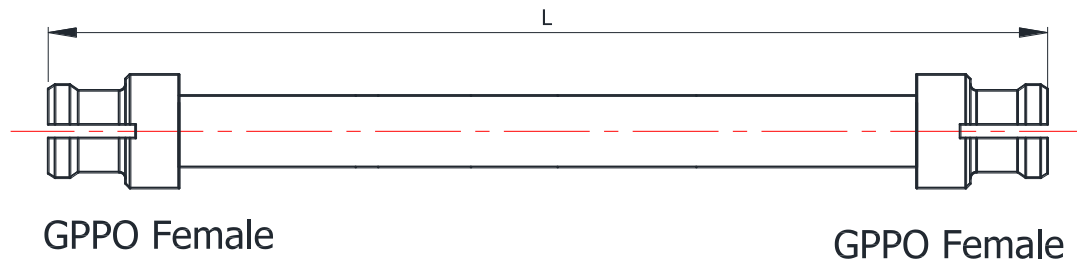

\* Label and Shrinking tube design depend on customer's request.

<b>Configuration</b>	
Connector 1 Type	GPPO(mini-SMP) Female
Connector 1 Body Style	Straight
Body Material and Plating	CuBe Gold Plated
Connector 1 Mount Method	None
Connector 2 Type	GPPO(mini-SMP) Female
Connector 2 Body Style	Straight
Body Material and Plating	CuBe Gold Plated
Connector 2 Mount Method	None
Cable Type	GUT-047-Form-FEP
<b>Electrical Specifications</b>	
Impedance	50 $\Omega$
Frequency	DC to 40 GHz
Return Loss/VSWR	10dB to 40 GHz
Phase Stability vs. Flexure	N/A
Amplitude Stability	N/A
Shielding Effectiveness	<-100dB @ 1GHz
Phase Matching	On request
Signal Delay	On request
Power Handling	10watt @ 18GHz at sea level,VSWR1.0
<b>Environmental Data</b>	
Temperature Range	-40°C to +125°C
2002/95/EC(RoHS)	Compliant

## Cable Specifications

Center Conductor	Silver plated copperweld
Dielectric	Solid PTFE
Jacket	FEP
Capacitance(pF/m)	95.1
Velocity of propagation(%)	70
Min. bending radius(mm)	7.63
Jacket Diameter(mm)	1.6±0.13

## Part Number List

Part Number	Length [mm]	Insertion Loss ≤(dB)
		40GHz
GA702-GPPFGPPF-40	40±5	1.6
GA702-GPPFGPPF-60	60±5	2.1
GA702-GPPFGPPF-130	130±5	3.8

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.