

ADAPTERS, BETWEEN-SERIES

Type N / BNC, DC - 8 GHz

SPECIFICATIONS:

Models: 5021, 5022, 5023, 5024

RoHS
Compliant

AEROFLEX
A passion for performance.


Electrical:

Frequency Range _____ DC - 8 GHz
VSWR _____ 1.30:1 Max.
Impedance _____ 50 Ohms
Operating Temp. Range _____ -65°C to +125°C


Mechanical:

Type N Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348
BNC Connectors _____ Nickel Plated Brass
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper


Model Number: **5021**
Type N Male / BNC Male




Model Number: **5022**
Type N Male / BNC Female

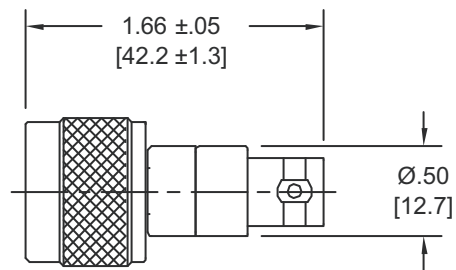

Model Number: **5023**
Type N Female / BNC Male

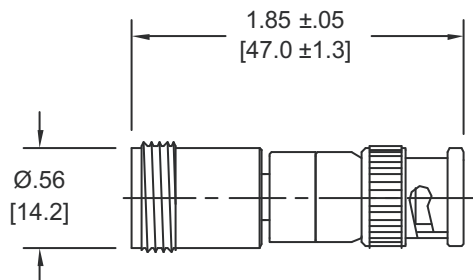

Model Number: **5024**
Type N Female / BNC Female

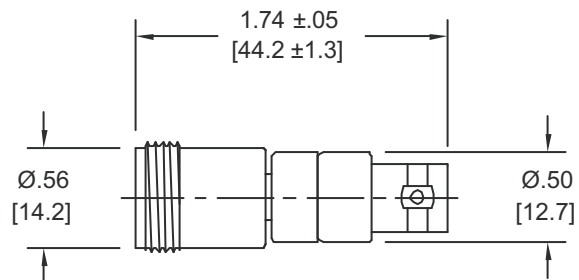

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

5021: REV A

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com