

5

4

3

2

1

SPECIFICATIONS

MECHANICAL

CONNECTOR BODY AND COUPLING NUT _____ STAINLESS STEEL IAW A582, TYPE 303. GOLD PLATED PER MIL-DTL-45204

GASKET _____ SILICONE RUBBER PER ZZ-R-765, CLASS 2B, GRADE 70

RETAINING RING _____ BERYLLIUM COPPER, C17200, CONDITION H, PER ASTM B194

CHAIN AND BUSHING _____ STAINLESS STEEL

FOR A DFARS VERSION ADD -DF TO PART NO (2021-1310-0X-DF) AND CONNECTOR WILL BE DFARS COMPLIANT.


HOUSING/COUPLING NUT FINISH PER SUFFIX (REPLACING -XX IN MODEL #)

- 00 OUTER CONDUCTOR / NUT BOTH GOLD PLATED
- 02 OUTER CONDUCTOR / NUT BOTH PASSIVATED SS


RoHS COMPLIANT DEVICE

MARKING

PART LOOKS LIKE PRODUCT IMAGE.
PART MARKING ORIENTATION AND FORMAT AS SHOWN.
MARKING TO BE AS LARGE AS POSSIBLE, CLEAR, AND READABLE.
XX=2 DIGIT PRODUCT NUMBER TAKEN FROM WORK ORDER.
YYWW = DATE CODE.



REVISIONS				
REV	DESCRIPTION	ECO #	DATE	APPROVED
-	RELEASE	12-066	12/12/12	T.KUHN
A	UPDATED FORMAT	15-142	6/11/15	T.KUHN
B	UPDATED MARKING	15-205	6/25/15	T.KUHN
C	UPDATED TOLERANCE	16-178	8/23/16	T.KUHN

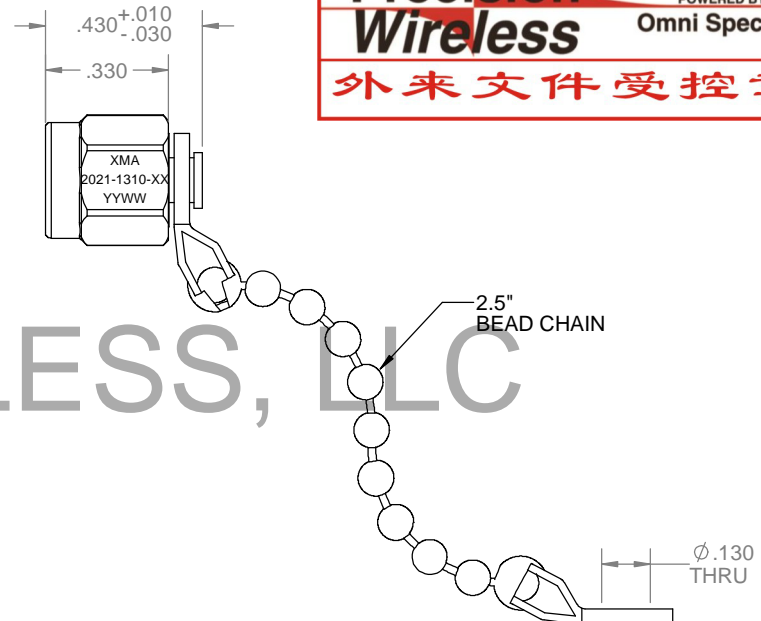

QTY.	PART NUMBER	DESCRIPTION	ITEM NO.
X	2021-1310-XX	DUST CAP, SMA-f	
1	TA-2021-1310-XXU	ASSY, DUST CAP, SMA-f, UNMARKED	1

DRAWING PRACTICES PER ANSI-Y-14.5 MIL-STD-100 & 1000	
DIMENSIONS ARE IN INCHES AND APPLY BEFORE / AFTER PROCESSING	
SURFACE ROUGHNESS	63
FINISH:	
SEE NOTE	
MATERIAL:	
SEE NOTE	
NOTE: THIS DRAWING INCORPORATES THIRD ANGLE PROJECTION.	
INTERPRET IAW ANSI Y14.5-1982	

UNLESS OTHERWISE SPECIFIED TOLERANCES IN:	
DECIMALS	INCH (MM)
.X"	.05" [1.27]
.XX"	.03" [.76]
.XXX"	.010" [.25]
ANGLES ±0°30'	
REMOVE ALL BURRS/SHARP W/ BREAK / R OF .003" TO .0005" UNLESS OTHERWISE NOTED	
DIAS CONCENTRIC <.003 T.I.R.	
DO NOT SCALE PRINT	

DRAWN	DATE
V.SHELBY	12/11/12
CHECKED	DATE
T.KUHN	12/12/12
ENG. APPR.	DATE
T.KUHN	12/12/12

Phone: 603-222-2256 Fax: 603-222-2259
 150 Dow Street, Manchester, NH 03101
 TITLE
DUST CAP, SMA-m

SIZE	CAGE CODE	DRAWING NUMBER	REV
B	3HT76	2021-1310-XX	C
SCALE	PLATED AREA SQ. IN	SHEET 1 OF 1	

5

4

3

2

1